

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 6th day of December, 1976, I found

evidence of the M.C. Gov. Lot 1, SE Cor. corner of Section 19 N-S 1/4, 11th NW 1/4.

Township 36, North, Range 11 East, Fourth Principal Meridian,


as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:


Glen Barker

Jim Clarlin

Herb Wagoner

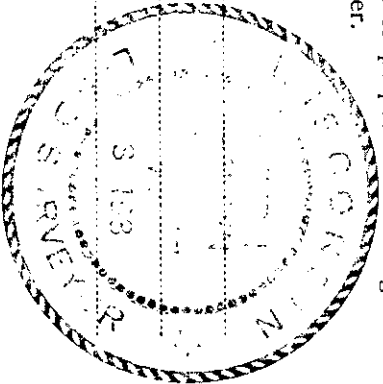

T36N R11E

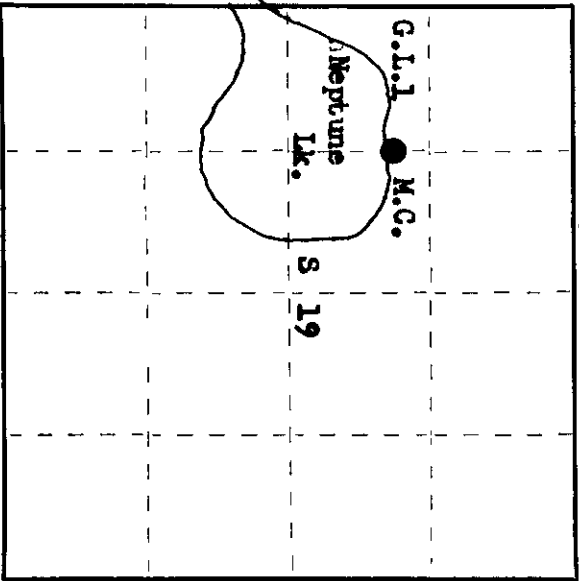

○ = Corner monument restored.

History of original corner establishment:

Corner established by D.H. Vaughan, County Surveyor, in 1900. Set post and marked NBT - Pine stump 12" S 27° W 23 links. Corner and BT recovered by H.C. Lawrence, Registered Land Surveyor. Set new post, but no mention made of any BT's established.

Description of corner evidence found:

Recovered 4" squared and scribed M.C. Sec. 29, Lot 1. A large rock cairn built around base.
Recovered OBT - Cedar 10" N 20° E 40.3 links, scribed S19 NBT.
Cedar stump 6" 2' high, N 74° W 17.8 links, scribed NBT.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced 4" squared cedar post with 1 1/2" OD iron pipe with brass cap, stamped:
Monument projects 2 1/2' above ground.
NBT - Cedar 7" S 86° W 74.7 links, scribed M.C. BT.
Corner sets 50 links north of north shore line of Bug Lake (now named Neptune Lake).
S4,98
T36N R11E
S112
M.C.
Gov. Lot 1
CPI - 1976

Dated at Rhineland, Wis., this 15th day of December, 1976

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 7th day of February, 1977 at 1:45 o'clock P. M.

Doree Savage Tuckin
(Register of Deeds)

By Joseph M. Boorn Deputy

0 2 2 2 5 1 1 9 2