

CERTIFIED LAND CORNER RESTORATION

Index No. P-12



State of Wisconsin

County of Oneida } ss.

History of original corner establishment:
No record of previous establishment.

I Phillip T. Hansen, do hereby
certify that on the 17th day
of April, 1975, I found
evidence of the EC-1/16
corner of Section 21
Township 36, North, Range
11 East, Fourth Principal Meridian,
I established a new monument and accessories
as described hereon; and that from this evidence
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:

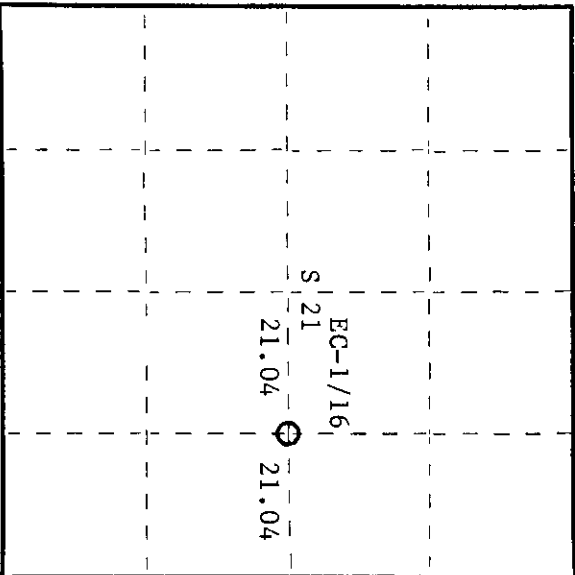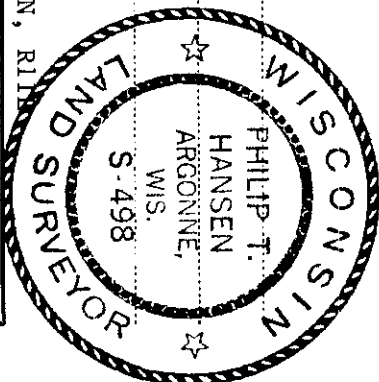

○ = Corner monument restored.

Description of corner evidence found:

Recovered 1/4 corner between Sections 20 and 21. Ran random line east to 1/4 corner between Sections 21 and 22.

From 1/4 corner between Sections 21 and 16, ran random line south to 1/4 corner between Sections 21 and 28. Corrected lines to determine position of center 1/4 corner. No trace of old C-1/4 corner found.

Description of monument and accessories I established to perpetuate the original location of this corner.
Established EC-1/16 corner, 21.04 chains N86°22'E of center 1/4 corner equidistant.

Set 1-1/2" O.D. iron pipe with 2" brass cap stamped - S498
Pipe projects 2" above ground, painted blue. T36N, R11E
Nothing available for BT's. EC-1/16 S|21

CPI-1975

Dated at Rhinelander, Wis., this 3rd day of June, 1975

Signature: Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida hereby certify that the within
instrument was filed in this office for record on the 1st day of October, 1975
at 3:02 o'clock P. M.

Doris Verge Kuehn
(Register Deeds)

By: _____ Deputy

361121 2010