


CERTIFIED LAND CORNER RESTORATION

Index No. T-24


State of Wisconsin }
County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 1st day of July, 1975, I found evidence of the EC-1/16 corner of Section 25 Township 36 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

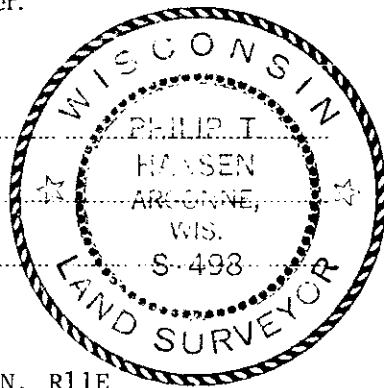

T36N, R11E

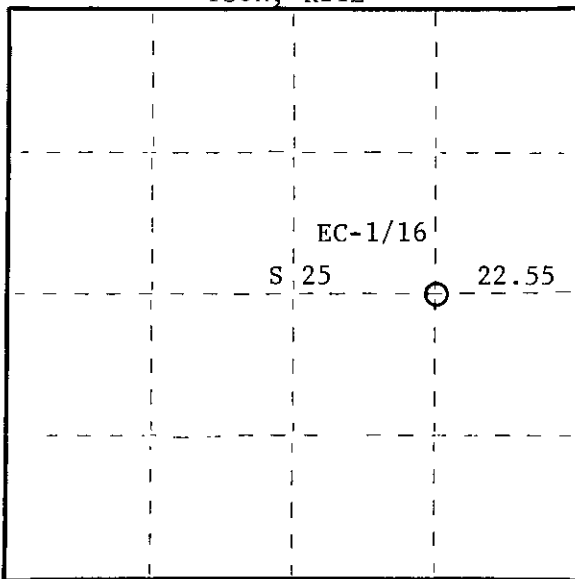

○ = Corner monument restored.

History of original corner establishment:

Corner established by B.F. Dorr, County Surveyor, in 1899 from which maple 12" bears N3°45'W, 18½ links.

H.C. Lawrence, Registered Land Surveyor, recovered Dorr's EC-1/16 post in 1954. No trace was found of the maple 12" BT. He replaced Dorr's post with new 4" cedar post and made BO to highline pole #91, S30°W, 24 links. This pole #91 is 22.47 chains East of N-S 1/4 line.

Description of corner evidence found:

Recovered 4" cedar post, squared and scribed EC-1/16 S25, EC-1/16, in good condition.

Recovered OBO - Highline pole #91 S30°W 24 links (24.3 links)

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced wooden post with 1½" OD iron pipe with 2" brass cap stamped - S498

T36N, R11E

NBT - White birch 11" N27°W 70.7 links scribed 1/16 BT

EC-1/16 S 25

CPI-1975

Dated at Rhinelander, Wis., this 18th day of July, 1975

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P. M.

Doris Verage Kuehn
(Register of Deeds)

By _____ Deputy

FORM 985 H. C. MILLER CO., MILWAUKEE

3611252010