

CERTIFIED LAND CORNER RESTORATION

Index No. **T-22**



State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 30th day of June, 1975, I found evidence of the WC-1/16 corner of Section 25 Township 36 North, Range 11 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

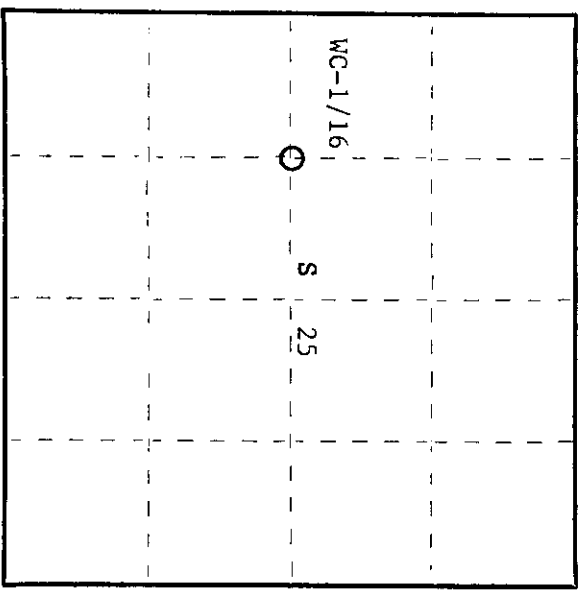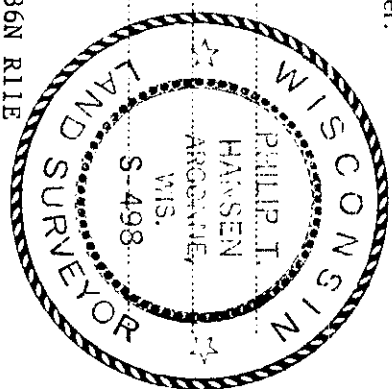

○ = Corner monument restored.

030052198

History of original corner establishment:

Corner established by B.F. Dorr, County Surveyor, in 1899. Tamarack 12" S69°E 14 links for BT.

H.C. Lawrence, Registered Land Surveyor, recovered Dorr's corner in 1954. Found his old post intact and tamarack 12" BT.

Lawrence set new cedar post in old post hole from which cedar 14" bears N280°E 23 links, cedar 9" bears S720°E 22 links, and cedar 8" bears S200°E 16 links. Corner is 2.18 chains north of centerline Highway #8, 20.16 chains east of line between Sections 25 and 26.

Description of corner evidence found:

Recovered 4" cedar post, squared and scribed S25 WC-1/16, in poor condition. Also, an old cedar point propped along side of post.

- Recovered 0BT - Cedar 9" S720°E 22 links - 5' decayed stub.
- Tamarack 12" S69°E 14 links - now a decayed stump.
- Cedar 14" (15") N280°E (N320°E) 23 links - scribed WC-1/16 S25 NBT.
- Cedar 8" (9") S200°E (S160°E) 16 links - scribed S25 NBT

Highline is 1.56 chains south of WC-1/16 corner.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced 4" cedar post with 1-1/2" iron pipe with 2" brass cap stamped -

No additional accessories.

S498
T36N R11E
WC-1/16 S 25
CPI 1975

Dated at Rhineland Wis. this 17th day of July, 1975.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida 1st day of October 1975
instrument was filed in this office for record on the 300 o'clock P. M.

Doris Terence Tucker
(Register of Deeds)

By Doris Terence Tucker Deputy