

CERTIFIED LAND CORNER RESTORATION

Index No. V-7

State of Wisconsin

County of Oneida } ss.

I, Philip T. Hansen, do hereby certify that on the 4th day of December, 19 79, I found evidence of the Quarter corner of Sections 29 and 32 Township 36, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

Glen Barker

Jim Claflin

Herb Wagoner

T36N R11E

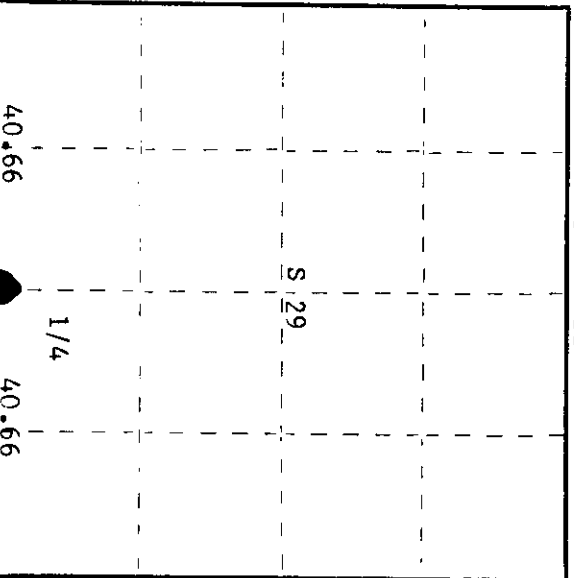

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1859, from which tamarack 8" bears S 19° W 7 links and tamarack 7" bears N 67° W 15 links.

H.C. Lawrence, Registered Land Surveyor, re-established the corner in 1955. Searched for but recovered no evidence of a corner. Ran random line S 86° 30' W from recovered section corner 28, 29, 32 and 33, a distance of 81.32 chains to close out 32 links north at right angle from section corners 29, 30, 31 and 32. Set a 5" cedar post, 16 links south of random 40.66 chains from west (intermediate).

Description of corner evidence found:

Recovered 5" cedar post, squared and scribed 1/4S S29, 1/4S S30 in very poor condition.
Recovered OBT's - Cedar 8" (10") S27°W 116 links, scribed 1/4 S32 NBT.
Maple 11" N10°W 71 links, now a cut off stump.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced wood post with 2-1/2" Bernetsen A-1 Federal Monument, stamped:
Monument projects 12" above ground.
Marked NBT's - Maple 7" N45°W 62.8 links S498-1979
Maple 6" N65°E 58.1 links T36N R11E
Sugar 6" N71°W 88.4 links
all scribed 1/4 BT. 1/4 S+32

Dated at Rhineland Wis., this 26th day of December, 19 79

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in his office for record on the 14th day of January, 19 80 at 1:30 o'clock P.M.

Doris George Fuchs
(Register of Deeds)

By: Deputy

3611290020