

CERTIFIED LAND CORNER RESTORATION

Index No. A-5

State of Wisconsin }
County of Oneida } ss.


I Philip T. Hansen, do hereby certify that on the 8th day of November, 1976, I found evidence of the Section corner of Sec. 5, 6, 31, 32 Township 35 - 36, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:


Glen Barker

Jim Claflin

Herb Wagoner

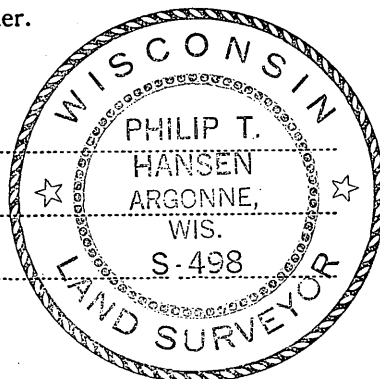

FORM 985

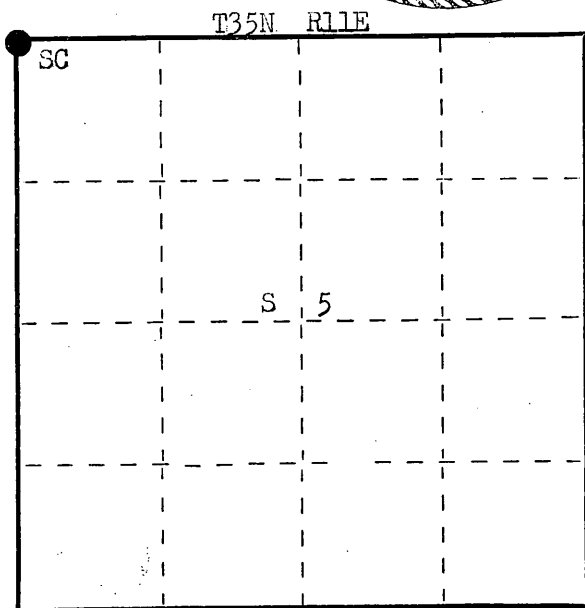

○ = Corner monument restored.

History of original corner establishment:

Original Corner established by Hiram C. Fellows, Deputy Surveyor, in 1859 from which Tamarack 8" bears N 28° W 23 links, Tamarack 8" bears N 36° E 13 links, Tamarack 12" bears S 23° E 20 links, Tamarack 10" bears S 73° W 14 links.

V.M. Maine, County Surveyor, set a 2½" iron pipe at corner which was recovered by H.C. Lawrence, Registered Land Surveyor, who set a wood post at the corner.

Description of corner evidence found:

Recovered Maine's 2½" iron pipe (brass cap broken off) and also H.C. Lawrence's 5" cedar post, squared and scribed S5, S6, S31, S32 1 link north of Maine's iron pipe.

Recovered OBT - Tamarack 9" N 86° E 50.2 links, scribing partly visible.
Tamarack 8" S 22° E 29.8 links, scribing partly visible.
No record on these two BTs.

Description of monument and accessories I established to perpetuate the original location of this corner.

Removed Maine's pipe from ground and replaced it with new 2½" iron pipe with brass cap, projecting 24" above ground. Cap stamped:
Marked NBT - Tamarack 6" N 24° E 80.7 links, scribed SC BT.
Area is all tag alder.
Corner sets 15 links south of old Town Line Road.
Now grown up to alders.

T36N R11E
Sec. 31 | 32
 6 | 5
T35N R11E
CPI-1976

Dated at Rhineland, Wis., this 30th day of November, 1976.

Signature Philip T. Hansen, Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 9th day of December, 1976 at 2:00 o'clock P M.

Doris Verage Kuehn
(Register of Deeds)
By Joseph M. Boomer Deputy

00001310000