

CERTIFIED LAND CORNER RESTORATION

Index No. X-14


State of Wisconsin }
County of Oneida } ss.

History of original corner establishment:
No evidence of any previous corner


I Daniel K. Plegger do hereby
certify that on the 20th day
of November 19 81, I found
Established the WC 1/16

corner of Section 34
Township 36 North, Range
11 East, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:



T36N R11E

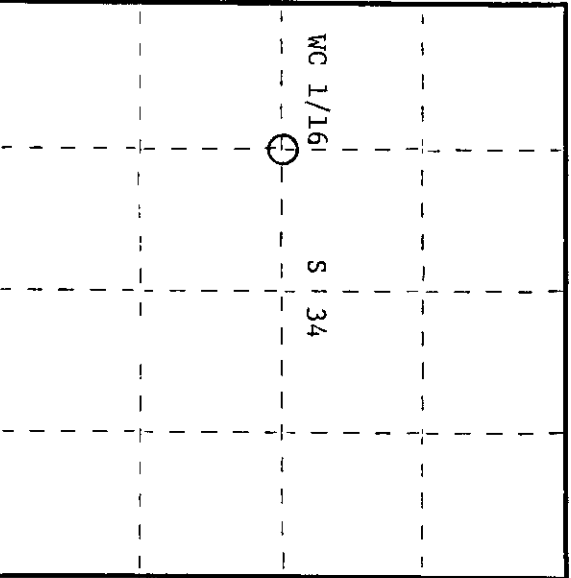

○ = Corner monument restored.

Description of corner evidence found:

Total distance from 1/4 corner between sections 33 & 34 to C/4 corner section 34 is 2921.077 ft. at bearing S81-40-52E. Set WC 1/16 1460.538 ft. intermediate.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1 1/2" iron pipe with 2" diameter aluminum cap stamped:

Monument projects 18" above ground.

Marked NBTs:

Sugar 5" S66W 10.23 ft.

Sugar 7" N36W 10.45 ft.

Scribed 1/16 - B.T.

S1537

T36N R11E

WC 1/16 S 34

CPI - 1981

Dated at Rhinelanders, Wis., this 8th day of January, 19 82

Signature: *Daniel K. Plegger* Title: Registered Land Surveyor Registration No. 1537
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 24th day of March, 19 82
at 10:35 o'clock P.M.

Tonia Verage Fuchs
(Register of Deeds)

By: Deputy

0000431139