
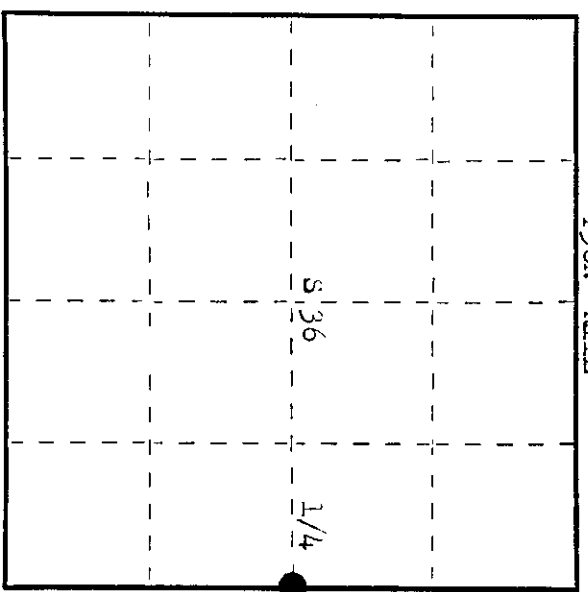


State of Wisconsin } ss.
 County of Oneida

I, Philip T. Hansen, do hereby certify that on the 23rd day of August, 1976, I found evidence of the quarter corner of Section 31 & 36 Township 36, North, Range 11 & 12 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Glen Barker
Jim Claffin
Herb Wagoner

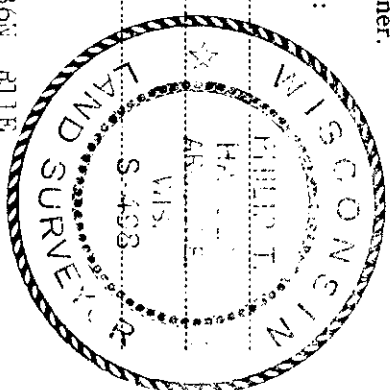

○ = Corner monument restored.

History of original corner establishment:

Original Corner established by Wm. W. Douglerty, Deputy surveyor, in 1859, from which Tamarack 8" bears N 85° W 35 links, and Tamarack 10" bears S 70° W 43 links. No records of any subsequent surveys.

Description of corner evidence found:

Recovered an old 3" squared and scribed cedar post in very poor condition. Scribing visible - 1/4 S31, 1/4 S36. Corner sets 17 links west of an old W-D County line road, grown over with tag alders and brush. No evidence of any BT's visible after thorough search. Corner believed to have been recovered and restored by G. Barker, Forest County surveyor.

Description of monument and accessories I established to perpetuate the original location of this corner.

replaced cedar post with 2 1/2" diameter W-D Federal monument stamped.
 monument projects 12" above ground.
 BT's - Tamarack 7" N 60° W 38.0 links, scribed 1/4 BT. T36N R11E
 Tamarack 7" N 52° W 82.2 links, scribed 1/4 BT. S 36 | 31 | 12
 Tamarack 8" S 68° W 89.0 links, scribed 1/4 BT. S 498-1976
 Drove support stakes beside post. Brought out old post for display. Monument and BT's painted blue.

Dated at Rhinelander, Wis., this 21st day of August, 1976.

Signature: Philip T. Hansen Title: Registered Land Surveyor Registration No. 5498
 County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 23rd day of September, 1976 at 1:00 o'clock P.M.

Dennis L. Strager, Trustad
 (Register of Deeds)

By: _____ Deputy