

CERTIFIED LAND CORNER RESTORATION

State of Wisconsin }
County of Oneida } ss.

I, JEROME N. KRAEMER, do hereby certify that on the 26 day of October, 1981, I found evidence of the one-quarter corner of Sections 10 and 11 Township 37 North, Range 6 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:

Original corner, a wood post established in 1863 by J. H. Jenkins, Government Deputy Surveyor.

Blk Pine 12 N32°W 38
Blk Pine 10 N66°E 20

From County record book V. M. Main County Surveyor. "Nov. 14, 1936. The Section line between Sections 10 and 11 is 78.96 in length-----etc. At 39.48 set 1/4 stk. official corner. 2.64 east of ran. Y.P. 16 N35°W .18; Y.P. 14 S28°W .84".

Description of corner evidence found:

Found 2" diameter iron pipe protruding 22" above ground level with a round tablet stamped: "T37, R6, S10, 1/4, S11, VM, 1937". From iron pipe, I locate Pine stump, scribed BT X, N21°W, 11.88 feet. A visible blaze is on a N. Pine 25" S28°W, 55 feet. A blazed and scribed N. Pine 11" bears S41°E, 22.32 feet.

Description of monument and accessories I established to perpetuate the original location of this corner:


Based on recorded and recovered evidence, I accept the existing 2" diameter iron pipe with stamped tablet as best available local evidence of corner.

Established following references:

Set PK nail and measured to same in lower existing scribed blaze of a N. Pine S41°E, 22.32 feet.

Set PK nail and measured to same in small unscribed lower blaze of a N. Pine S28°W, 54.83 feet.

Blazed, scribed and set PK nail in lower blaze and measured to same in N. Pine 11" N18°E, 39.45 feet. Corner is 50 feet east of east edge of field.

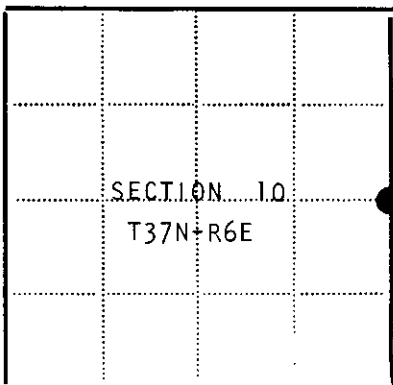

● = Corner monument restored
□ =

Resident witnesses.....

Dated at Minocqua Wisconsin, this 12 day of March 1982

Signature *Jerome N. Kraemer* Title Registered Land Surveyor
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Surveyors Registration No. S-1448

Office of Register of Deeds County of Oneida
I hereby certify that the within instrument was filed in this office for record on the 11 day of June 1986, and was filed in Book No. Page No. of County Records.

Signature *Doris Verge Kuehn* Title Reg. of Deeds
Cynthia A. Pitts, Deputy

Township....., Range....., Section....., Index No....., Page No.....

3706102000

6-17