

CERTIFIED LAND CORNER RESTORATION

State of Wisconsin }  
County of Oneida } ss.

I James D. Rein, do hereby certify that on the 25th day of July, 19 79, I found evidence of the North one-quarter corner of Section 2 Township 36 North, Range 7 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new ~~monument~~ and accessories as described hereon to perpetuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:

September, 1860 Alfred Millard, Deputy Surveyor set wood post witnessed by a 14" White Pine N64°W, 23 links (15.18 feet); 12" Yellow Pine S60°E, 32 links (21.12 feet)  
November 26th, 1898 B. F. Dorr found N 1/4 post.  
June 4th, 1936 V. M. Maine found remains of old stake and hole  
Stps of original bearing trees 14" White Pine N64°W, .23 ch (15.18 feet); 12" Yellow Pine S60°E, .32 ch (21.12 feet). Set official iron pipe, brass cap, stamped. marked new bearing trees 14" Yellow pine stump S60°W, 88 ch (58.08 feet); 10" Yellow Pine S76°E 1.25 ch. (81.18 feet)



Description of corner evidence found:

Oneida County brass capped 2" inside diameter galvanized iron pipe up 2 1/2 feet leaning to the south. Corner is plus or minus 1 foot north of an old barbed and woven wire fence which runs east and west.

Description of monument and accessories I established to perpetuate the location of this corner:

Straightened up the existing County monument and made BTs scribed "1/4 S B.T." with r.k. nails driven in blaze as follows:

- 20" Oak S55°W, 74.04 feet
- 9" Soft Maple in clump of four S32°E, 21.35 feet
- 8" Cherry N46°E, 45.24 feet.

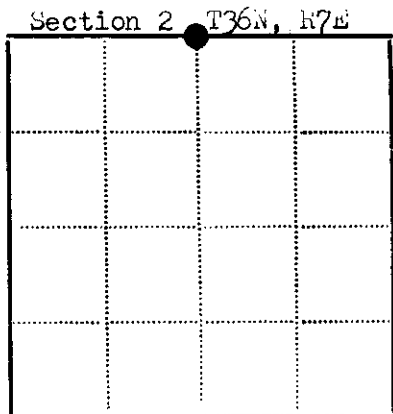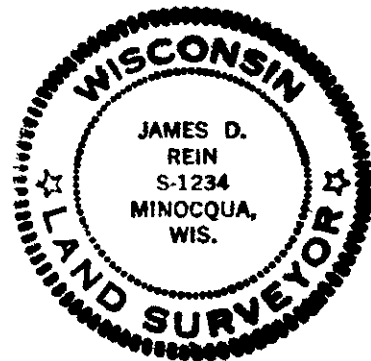

- - Corner monument restored
- -

Resident witnesses none

Dated at Minocqua Wisconsin, this 10th day of September, 19 79.

Signature James D. Rein Title Reg. Land Surveyor  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Surveyors Registration No. S-1234

Office of REGISTER OF DEEDS County of Oneida

I hereby certify that the within instrument was filed in this office for record on the 17th day of September 19 82, and was filed in Book No. Page No. of County Records.

Signature Lora Verage Kuehn Title REGISTER OF DEEDS

Township, Range, Section, Index No., Page No.

A-19