

State of Wisconsin

County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 23rd day of March, 19 77, I found evidence of the E 1/16 corner of Section 1 & 12



Township 37, North, Range 8 East, Fourth Principal Meridian.

I established a new monument and accessories as described hereon; and that from this evidence as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clark in

Herb Wagoner

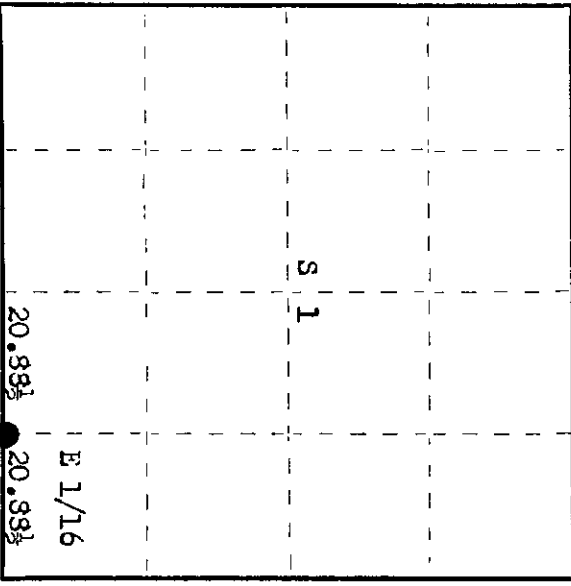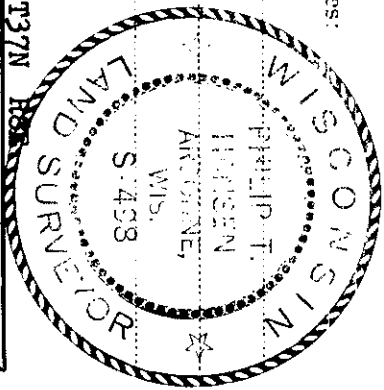

○ = Corner monument restored.

History of original corner establishment:

Corner established by N. Loftus, Ripco Surveyor. Ran random line S 88° 30' W from NW Corner 83.53 chains to close out 1.42 chains south of NW corner. Set E 1/16 at 20.38 1/2 chains, 35 1/2 links north. Marked NBTs - Maple 6" N 22° W 14 links Maple 7" S 25° E 48 1/2 links

Description of corner evidence found:

Recovered 1" iron pipe with 2" square brass cap. Monument was in position, but badly bent and about to break off. Recovered OBTs - Maple 6" N 22° W 14.0 links, scribed E 1/16 S1 BT. (now dead). Maple 7" (8") S 25° E 48.5 links, scribing not legible.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced bent monument with 1 1/2" iron pipe with 2" brass cap, stamped: Monument projects 22" above ground. NBT - Oak 7" N 64° W 68.2 links, scribed 1/16 BT.

S498
137N R8E
E 1/16 S 1/12
CPI-1977

Dated at Rhinelander, Wis., this 28th day of March, 1977

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida at 12 day of April, 1977.
I hereby certify that the within instrument was filed in this office for record on the 12 day of April, 1977 at 12 o'clock P. M.

Doris George Keenan
(Register of Deeds)

By: _____ Deputy

3708010010