

CERTIFIED LAND CORNER RESTORATION

Index No. **D-25**

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby

certify that on the 22nd day

of April, 1977, I found



evidence of the S. 1/16

corner of Section 1 & 6,
Township 37, North, Range
8 & 9 East, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:

Jim Claflin

Herb Wagoner

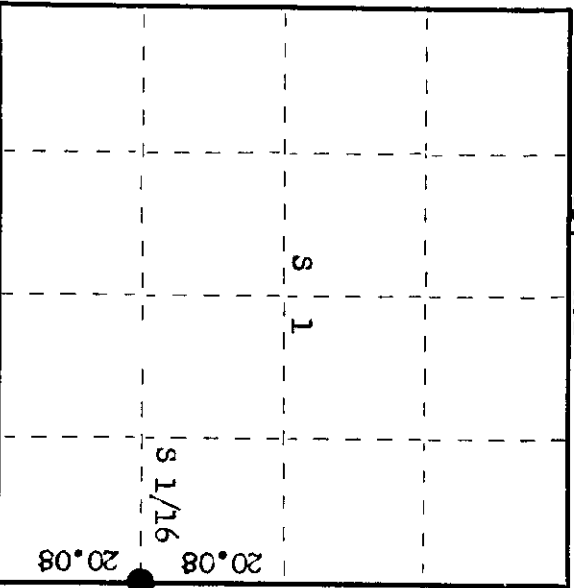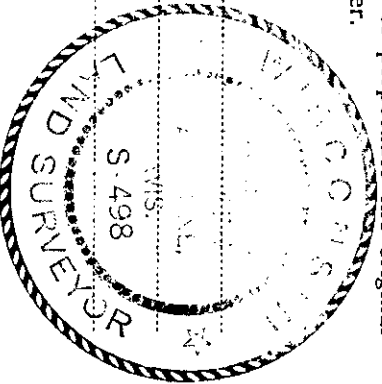

○ = Corner monument restored.

History of original corner establishment:

Corner established by N. Loftus, Ripco Surveyor, in 1960. Ran random line 358' mag. from recovered SE Section Corner 40.16 chains to close out 1.10 chains west of B.F. Dorr's 1/4 corner.

Set S 1/16 corner at 20.08 chains, 55 links east.

Marked NBTs - Red Pine 9" S51°E, 20' links

White Pine 9" N23°W, 19 links

Description of corner evidence found:

Recovered 1" iron pipe with 2" brass cap stamped:

Monument projects 12" above ground.

Monument recovered in excellent condition and securely in ground.

Recovered OBTs - White Pine 9" N23°W, 19.0 links (18.7 links),

scribed S 1/16 BT.

Red Pine 9" S51°E, 20.25 links (21.0 links),

scribed S 1/16 BT.

RIPCO
S 1/16
S1 + S6
37-8 37-9

Description of monument and accessories I established to perpetuate the original location of this corner.

No additional accessories established.

Dated at Rhineland, Wis., this 4th day of May, 1977.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within
instrument was filed in this office for record on the 6th day of May, 1977
at 1:00 o'clock P. M.

Dana Savage Fischer
(Register of Deeds)

By _____ Deputy

3708011000