

CERTIFIED LAND CORNER RESTORATION

Index No. **D-21**

State of Wisconsin


County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 19th day of April, 1977, I found evidence of the S 1/16 corner of the Section 1 & 2 Township 37, North, Range 8 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

Jim Claffin

Herb Wagoner

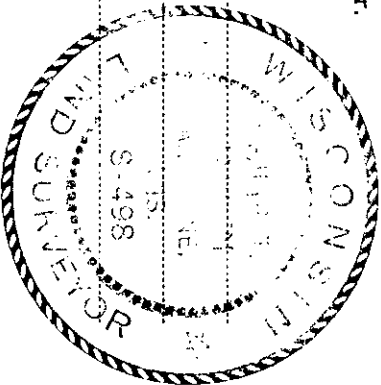

T37N R8E

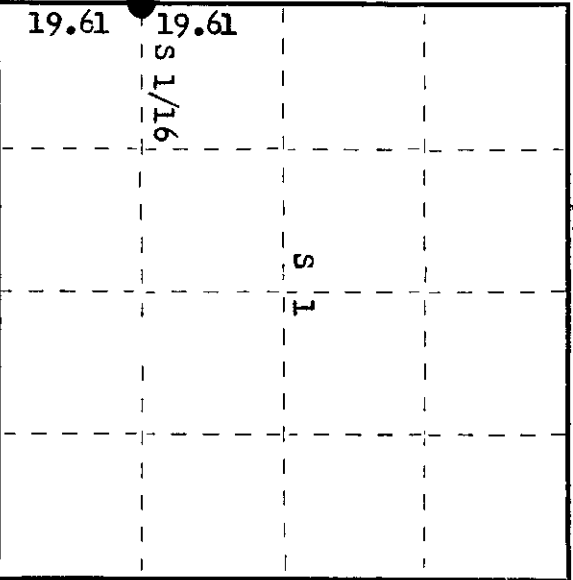

○ = Corner monument restored.

History of original corner establishment:

Corner established by N. Loftus, Ripco Surveyor, in 1960. From previously established SW Section Corner and W 1/4 corner, ran traverse and set S 1/16 by proportion, 19.61 chains intermediate.

Marked BTS - Red Pine 5" S68°E, 38.5 links.  
Jack Pine 5" S33°W, 8.5 links.

Description of corner evidence found:

Recovered 1" iron pipe with 2" brass cap, stamped:  
Monument projects 30" above ground.  
Recovered OBTS - Red Pine 5" (7") S68°E (S64°E) 38.5 links  
Jack Pine 5" (6") S33°W, 8.5 links (9.0 lks)  
Both BTS scribed S 1/16 S2 BT.  
T37N R8E  
S 1/16  
S2 BT  
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner. As monument was recovered in good condition and found secure in ground, it was left as recovered. No additional accessories were established.

Dated at Rhinelander, Wis., this 4th day of May, 1977.

Signature: Phillip T. Hansen Title: Registered Land Surveyor Registration No. 3498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 6th day of May, 1977 at 1:00 o'clock P. M.

Lena Trage Kuehn  
(Register of Deeds)

By: \_\_\_\_\_ Deputy

0001208073