

CERTIFIED LAND CORNER RESTORATION

Index No. J-21



State of Wisconsin }
County of Oneida } ss.

I Phillip T. Hansen do hereby
certify that on the 6th day
of May, 1977, I found
evidence of the Section
corner of 11, 12, 13 & 14
Township 37, North, Range
8 East, Fourth Principal Meridian,
as described hereon; and that from this evidence
I established a new monument and accessories
as described hereon to perpetuate the original
location of this corner.

Resident witnesses:

Jim Clafin

Herb Wagoner

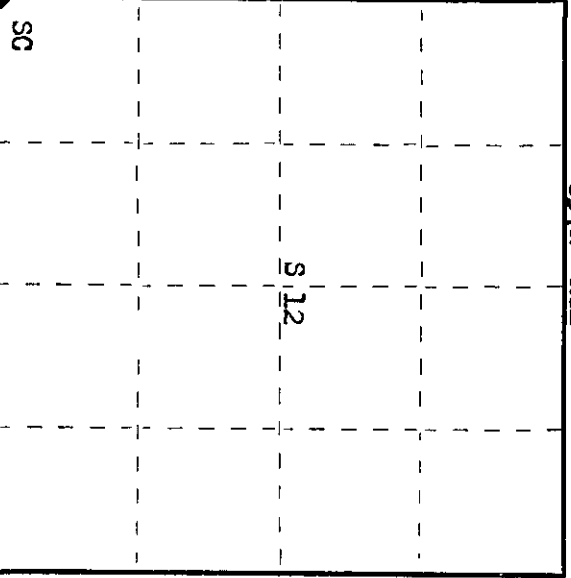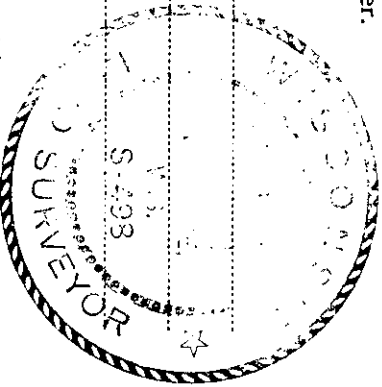

○ = Corner monument restored.

History of original corner establishment:

Original Corner established by Wm. E. Dougherty, Deputy Surveyor, in 1863. Corner recovered by D.H. Vaughan, County Surveyor. Corner reset by N. Loftus, Ripco Surveyor, in 1960. Ran random line south from Section Corner 1, 2, 11 & 12, 79.12 chains, which checked Vaughan's measurement to old fence corner. Corrected bearing N 0° 47' W. Marked MBTs - Tamarack 7" S39°W, 60 links and Fir 6" N10°W, 28-1/3 links.

Description of corner evidence found:

Recovered 2" iron pipe with 4" square brass cap in good condition, firmly in ground and projecting 1/4" above ground. Cap stamped:
Recovered Balsam Fir 6" (7") N10°W, 28.2 links, scribed BF.
Tamarack 7" (8") S39°W, 60.0 links (60.3 links),
scribing not legible.

T37N R8E
S11 S12
S14 S13
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.
As monument was recovered in good condition, it was left in place.
No other trees available for BTs.

Dated at Rhineland, Wis., this 10th day of May, 1977.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within
instrument was filed in this office for record on the 16th day of May, 1977
at 10:30 o'clock A. M.

Signature Terrie Terrence Kuehn
(Register of Deeds)

By _____ Deputy

3708110000