



CERTIFIED LAND CORNER RESTORATION

Index No. F-1

State of Wisconsin }
 County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 23rd day of March, 1977, I found evidence of the N 1/16 corner of Section 7 & 12 Township 37 North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Jim Claflin
Herb Wagoner

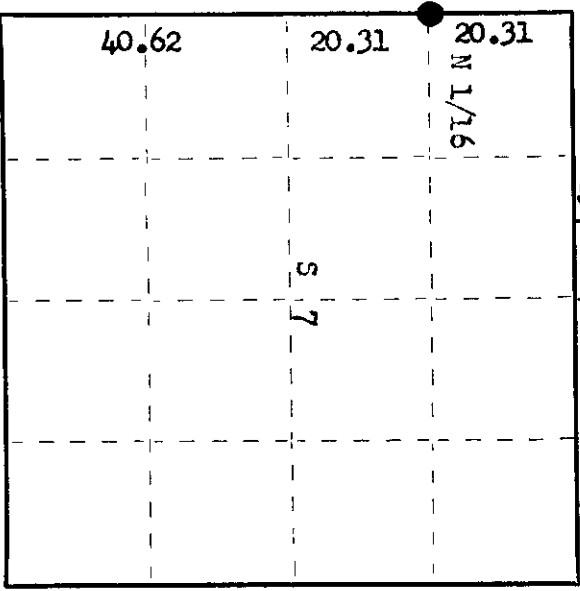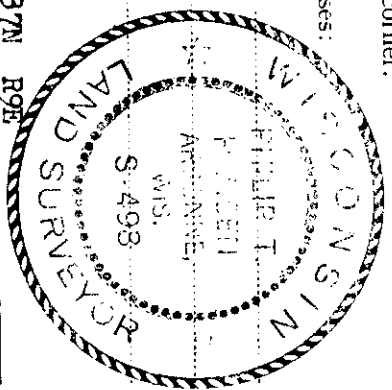

○ = Corner monument restored.

History of original corner establishment:

Corner established by N. Loftus, Ripco Surveyor, in 1960. Ran random line N 0° 30' E from SE corner section 12, 81.24 chains to close out 4.23 chains east. Corrected bearing N 1° 37' W. Set N 1/16 at 60.93 chains, 3.167 chains west and marked NBTs - Red Pine 6" S 10° W, 9 1/2 links and Red Pine S 85° E 13 1/2 links.

Description of corner evidence found:

Recovered 1" iron pipe with 2" square brass cap in good condition. Monument projects 20" above ground. Cap stamped:

Recovered OBTs - Red Pine 6" S10°W (S18°W) 9.5 lks (10.0 lks),
 scribed N 1/16 S12-37-8
 Red Pine 7" S85°E 13.25 lks (12.8 lks).
 Distances measured to center of tree.

Description of monument and accessories I established to perpetuate the original location of this corner.
No additional accessories established.

Dated at Rhineland, Wis., this 28th day of March, 1977.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
 Instrument was filed in this office for record on the 1st day of March, 1977
 at 100 o'clock P. M.

James George Kuehne
 (Register of Deeds)

By _____ Deputy

3708123000