

CERTIFIED LAND CORNER RESTORATION


Index No. E-1

State of Wisconsin }
 County of Oneida } ss.

I Phillip T. Hansen, do hereby
 certify that on the 27th day
 of August, 1979, I found

evidence of the Section
 corner of Sections 1, 6, 7 and 12
 Township 37, North, Range
9 & 10 East, Fourth Principal Meridian,
 as described hereon; and that from this evidence
 I established a new monument and accessories
 as described hereon to perpetuate the original
 location of this corner.

Resident witnesses:
 Glen Barker
 Jim Claffin
 Herb Wagoner

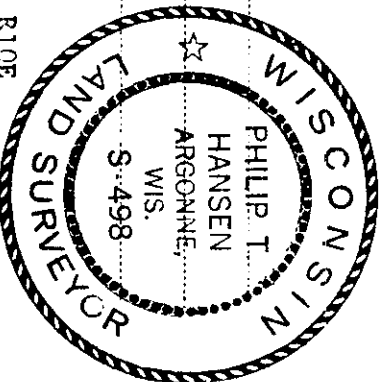

History of original corner establishment:
 Original corner established by Hiram Fellows, Deputy Surveyor, in 1860.
 Marked BT's - Spruce 8" S85°W 16 links; Spruce 10" N35°W 5 links; Spruce 7" N74°E 8 links;
 Spruce 12" S52°E 39 links.
 Corner re-established by Ripco surveyors, no records available.

Description of corner evidence found:

Recovered Ripco's 2-1/2" iron pipe with 4" square brass cap, projecting 24" above
 ground, stamped:

Recovered CBT's -


Black Spruce 7" S71°E 9.1 links, scribed S7 RT. T37N
 Black Spruce 6" N56°W 23.4 links, scribed S1 BT. (now dead) R9E 12+6 R10E
 R1PCC

Description of monument and accessories I established to perpetuate the original location of this corner.

Left monument in place as recovered.

Marked NBT's -

Black Spruce 8" S68°W 22.2 links
 Black Spruce 8" S11°E 30.1 links
 Black Spruce 6" N41°W 17.8 links
 all scribed SC RT.

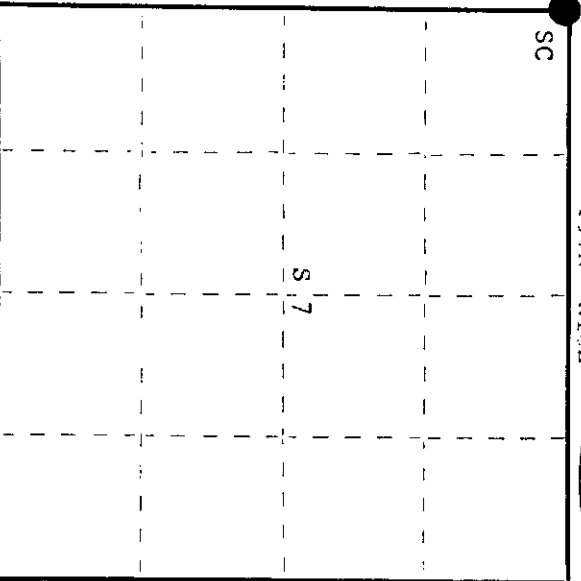

○ = Corner monument restored.

Dated at Rhineland, Wis., this 10th day of September, 1979.

Signature: Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
 County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida
 Instrument was filed in this office for record on the 17th day of September, 1979
 at 105 o'clock P. M. I hereby certify that the within

By: Dona Terage Kuehn (Register of Deeds)

By: _____ Deputy

370901 0000