

CERTIFIED LAND CORNER RESTORATION

Index No. **G-1**

State of Wisconsin } ss.

County of Oneida



I, Phillip T. Hansen, do hereby certify that on the 3rd day of June, 1977, I found evidence of the Quarter corner of Sec. 12 - 7

Township 37, North, Range 10 & 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clafflin

Herb Wagoner

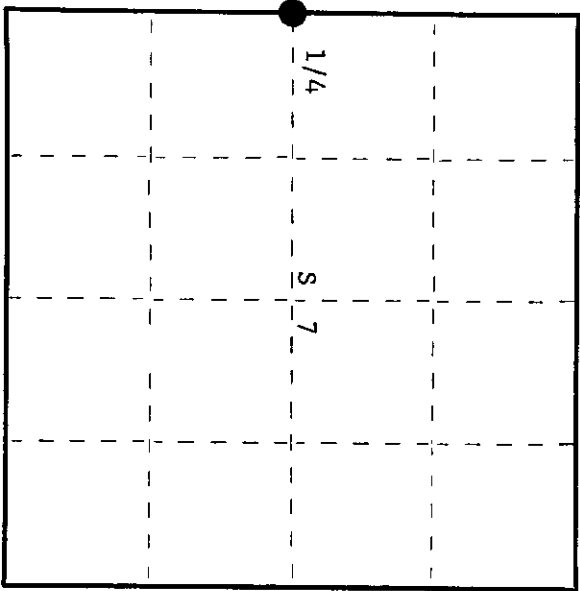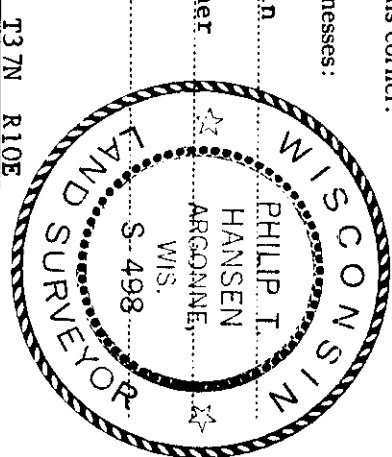

○ = Corner monument restored.


History of original corner establishment:

Corner established by Hiram C. Fellows, Deputy Surveyor, in 1860, from which Spruce 8" bears S72°E, 26 links; Spruce 10" bears S36°W, 51 links. Corner restored by D.H. Vaughan, County Surveyor. N. Loftus, Ripco Surveyor, recovered and restored this corner in 1958. Started from this corner, ran lines North, South and East. No records of corner or BTs marked.

Description of corner evidence found:

Recovered 2" iron pipe with a 4" square brass cap, stamped: Monument projects 14" above ground. Monument recovered in excellent condition. Recovered OBTS - Black Spruce 3" N54°E, 14.5 links, scribed 1/4 S7 BT.

Black Spruce 4" N7°W 20.3 links, scribed 1/4 S12 BT. These BTs killed by fire.



Description of monument and accessories I established to perpetuate the original location of this corner.

Marked NBTs - Jack Pine 7" N21°W, 6.5 links, scribed 1/4 BT. Jack Pine 6" N73°W, 13.0 links, scribed 1/4 BT. Black Spruce 6" S6°W, 77.2 links, scribed 1/4 BT.

Dated at Rhineland, Wis., this 8th day of June, 1977.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida at 9:20 o'clock a M. I hereby certify that the within instrument was filed in this office for record on the 30th day of June, 1977.

Doris Lorange Kuehn
(Register of Deeds)

By Joseph M. Boerner Deputy

3709122000

