

3709172030

CERTIFIED LAND CORNER RESTORATION

Index No. L-6

State of Wisconsin



County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 23rd day of April, 1976, I found evidence of the MC 1/16 corner of Section 17 Township 37 North, Range 9 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clafin

Herb Jagoner

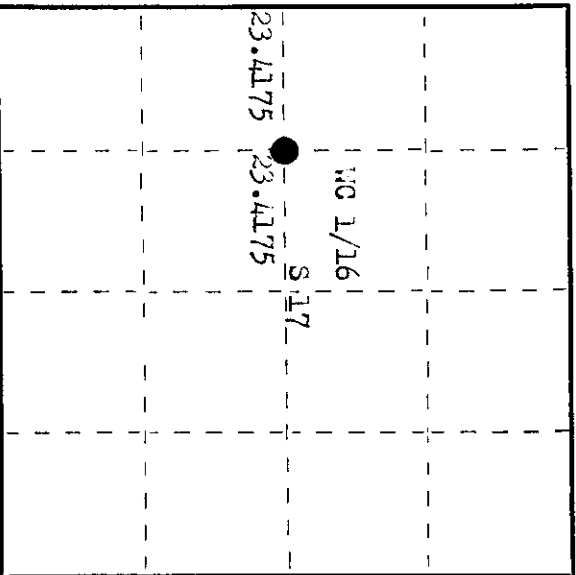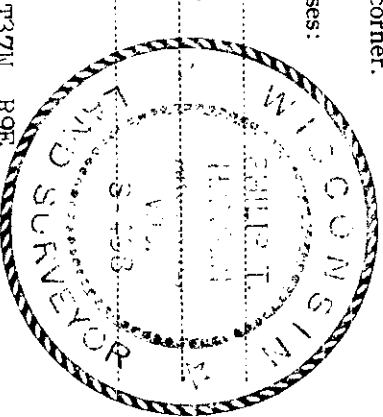

○ = Corner monument restored.

History of original corner establishment: Corner established by Ripco surveyors, Goddard and Drivers. Ran traverse east from N 1/4 Corner. Computed distance 89.93 chains, established C 1/4 Corner at 46.835 chains on bearing S 88° 19' 37" East. Set MC 1/16 at 23.4175 chains equidistant between W 1/4 corner and C 1/4. Marked BTs - Maple East 14 lks. N. Pine W 42° " 10 lks. Set iron pipe with aluminum cap.

Description of corner evidence found:

Recovered 1 1/2" OD iron pipe with aluminum cap salvaged, in perfect condition.

Recovered OBTs - Maple 8" Due East 14 lks (now dead) Red pine 1 1/2" N 42° " 10 lks, scribed C. 1/16 S 1/4 BT.

Description of monument and accessories I established to perpetuate the original location of this corner. as monument was in excellent condition, we left it in place, added stamping T37N R9E to cap. Monument projects 20" above ground. BT - sugar 8" S 14° W 44.0 lks, scribed 1/16 BT. Monument and BTs painted blue.

Dated at Rhinelander, Wis., this 16th day of August, 1976

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. 5498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 23rd day of April, 1976 at 10:00 o'clock P.M.

Signature Annalynne Rudka
(Register of Deeds)

By _____ Deputy