

CERTIFIED LAND CORNER RESTORATION

Index No. J-3

State of Wisconsin



County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 24th day of June, 1977, I found evidence of the Quarter corner of Section 7 & 18 Township 37 North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Clafflin

Herb Wagoner

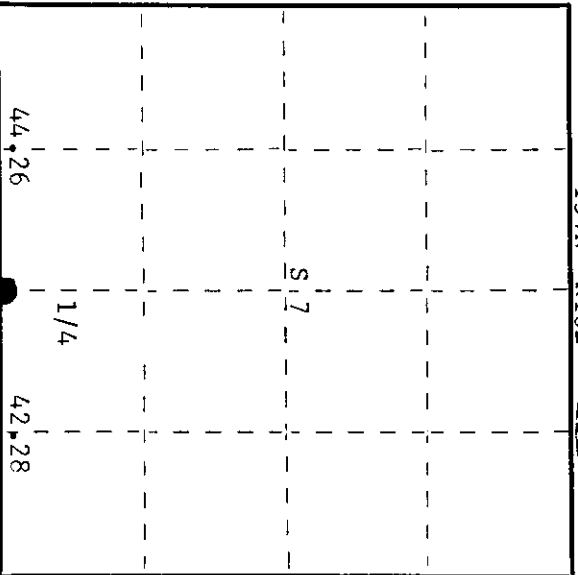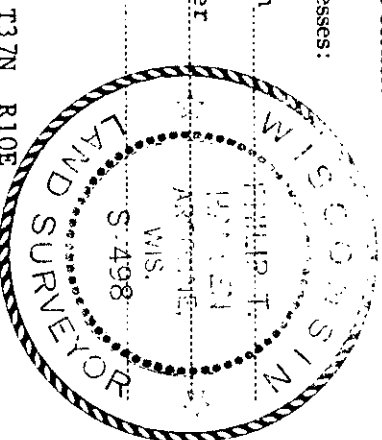

○ = Corner monument restored.

History of original corner establishment:

Original Corner established by Wm. E. Dougherty, Deputy Surveyor, in 1863, from which Spruce 8" bears S50°E, 6 links and Spruce 10" bears N46°W, 5 links. Corner established by proportional measurement by N. Loftus, Ripco Surveyor, in 1958. Ran random line 275 mag. 86.54 chains from Section Corner 7, 8, 17, 18 to close out 57-3/4 links north of Section Corner on range line. Set 1/4 corner at 42.28 chains. Marked BTs - Jack Pine N48°E, 15 1/2 links; Jack Pine 9" S46°W, 65-3/4 links. Corrected bearing N85° 26' W.

Description of corner evidence found:

Recovered 2" iron pipe with 4" square brass cap in excellent condition.
 Recovered OBTs - Jack Pine 6" (8") N48°E, 15.25 links (16.0 links).
 Jack Pine 9" (10") S46°W, 65.75 links (66.1 links).
 Monument projects 20" above ground. Cap stamped:

T37N R10E
 S17 1/4
 S18 1/4
 RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.
 Monument left as recovered.
 NBT - Black Spruce 6" S20°E, 25.3 links, scribed 1/4 BT.

Dated at Rhineland, Wis., this 12th day of July, 1977

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
 County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida
 Instrument was filed in this office for record on the 5th day of August, 1977
 at 9:00 o'clock P. M.

Doris Teraga Kuehn
 (Register of Deeds)

By Doris Teraga Kuehn Deputy

3710070020