

CERTIFIED LAND CORNER RESTORATION

Index No. J-13

State of Wisconsin


County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 6th day of December, 1978, I found evidence of the Section corner of Sections 9, 10, 15 & 16 Township 37, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

Glen Barker

Jim Claffin

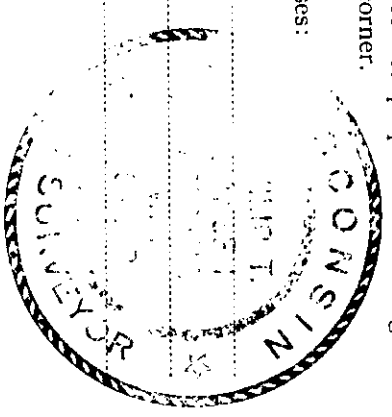

T37N R11E

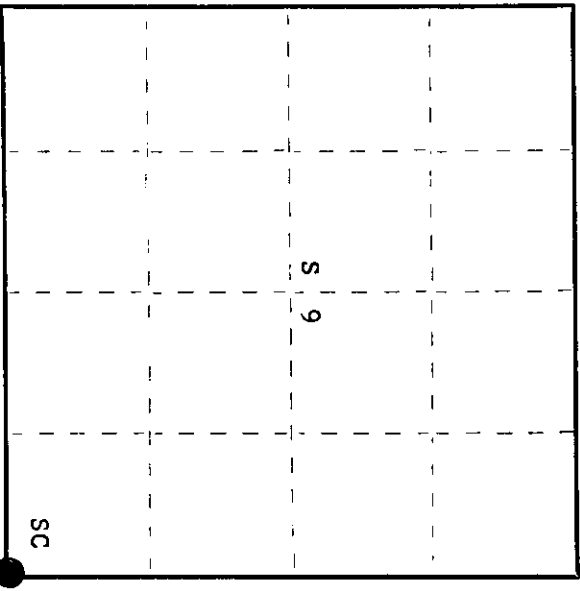

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, deputy surveyor, in 1859 from which tamarack 9" bears S 60° E 20 links and tamarack 9" bears N 60° W 18 links. Corner recovered by V.M. Maine, county surveyor. Set 2-1/2" iron pipe in 1935. Marked NBT's - yellow birch 10" N70°E 24 links; yellow birch 10" N35°W 47 links; yellow birch 8" S5°W 26-1/2 links
 Corner recovered by H.C. Lawrence, Registered Land Surveyor. Set a new wood post beside iron pipe.

Description of corner evidence found:

Recovered Maine's 2-1/2" iron pipe with screw-in brass cap, stamped: Monument projects 24".
 Recovered Lawrence's wood post, scribed S9, S10, S15, S16 standing beside it.
 Recovered OBT's -
 yellow birch 8" N35°W 42-1/2 links, now a decayed stump. S9 + S10
 yellow birch 8" N40°E 45 links, now a decayed stump. S16 + S15
 cedar 7" (12") N15°W 94 links, scribing visible.
 cedar 6" (12") N60°W (N64°W) 120 links, scribing visible.

Description of monument and accessories I established to perpetuate the original location of this corner.

Left Maine's iron pipe in place as recovered.
 Marked NBT's - white birch 8" N21°E 21.15 links, scribed SC BT.
 white birch 6" S84°W 9.6 links scribed SC BT.

Dated at Rhineland, Wis., this 2nd day of January, 1980

Signature: Phillip T. Hansen Title: Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 11th day of February, 1980 at 2:15 o'clock P. M.

Doris Berger Kuehn
 (Register of Deeds)

By: _____ Deputy

371109000