

CERTIFIED LAND CORNER RESTORATION

Index No. **K-17**

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 28th day of October, 1975, I found evidence of the N-1/16 corner of Sections 14 and 15


Township 37, North, Range 11 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

Glen Barker

Jim Claflin

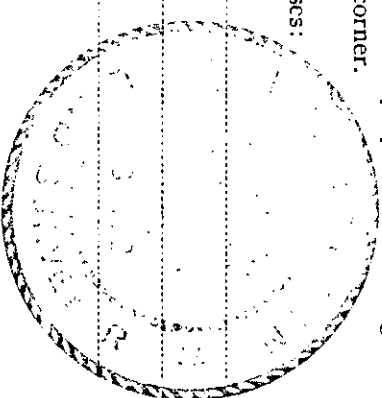

T37N R11E

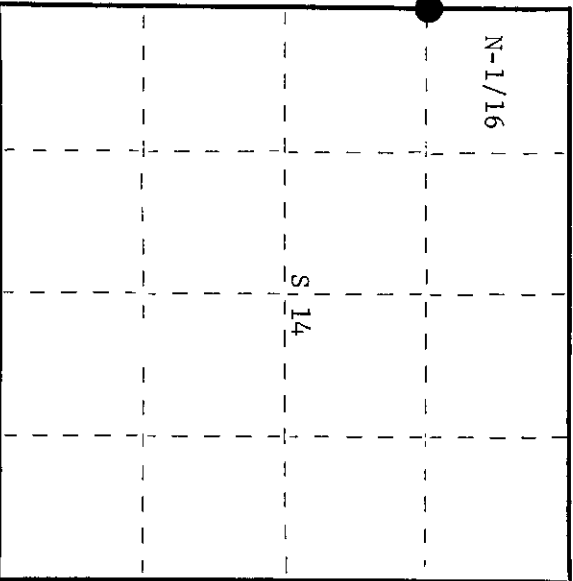

○ = Corner monument restored.

History of original corner establishment:

Original corner established by J.J. Melendy, Gagen Lumber Company surveyor. Corner recovered by H.C. Lawrence, Registered Land Surveyor. Set new tamarack post and marked NBT's: Spruce 4" West 3 links and Spruce 7" N25°E 23 links.

Description of corner evidence found:

Recovered 6" tamarack post, squared and scribed 1/8S S14, 1/8S S15 in poor condition.  
 Recovered OBT's: Spruce 4" West 3 links - now decayed stump,  
 Spruce 7" N23°E 23 links - now decayed stump.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced 6" tamarack post with 1" iron pipe with 2" brass cap stamped - S498  
 Projects 18" above ground. T37N R11E  
 NBT's: Black spruce 5" S53°E 18.8 links - scribed 1/16 BT, S15|S14  
 Black spruce 7" N77°E 41.5 links - scribed 1/16 BT. N-1/16  
 Pipe and BT's painted blue. CPI-1975

Dated at Rhineland, Wis., this 7th day of November, 1975.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498  
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida Pat day of November, 1976  
 at 3:30 o'clock P. M. I hereby certify that the within instrument was filed in this office for record on the

Doreeberger Kuehn  
 (Register of Deeds)

By: \_\_\_\_\_ Deputy