

CERTIFIED LAND CORNER RESTORATION



R / 8
Index No. R-18

State of Wisconsin

County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 6th day of May, 1975, I found evidence of the W-1/16 corner of Sections 23 and 26 Township 37 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

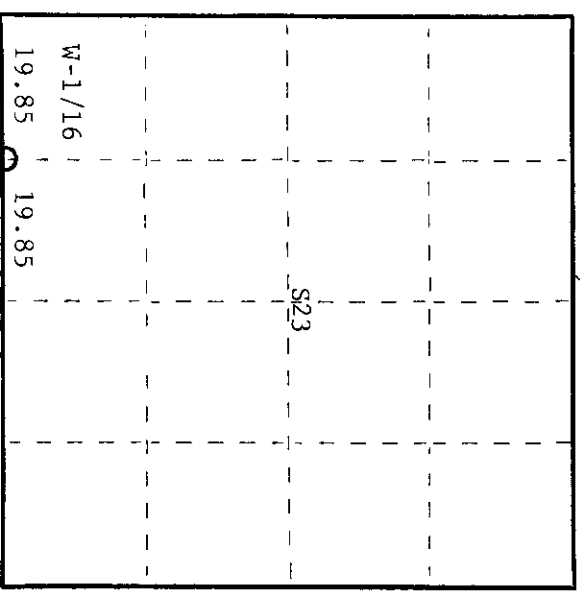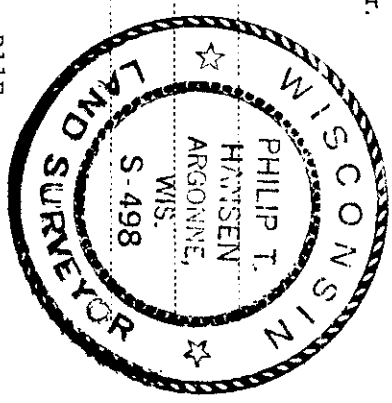

○ = Corner monument restored.

History of original corner establishment:
Original corner established by H.C. Lawrence, Registered Land Surveyor, during his retracement survey in 1949.
A 4" tamarack post, squared and scribed, was set on corrected line between S-1/4 corner and section corners 22, 23, 27, and 26 equidistant at 19.85 chains from which a sugar maple 6" bears S150W, 13-1/2 links and white birch 8" bears N130E, 27-1/2 links.

Description of corner evidence found:
Recovered 4" tamarack post, squared and scribed S23 W-1/16 broken off and lying on the ground. From intersection of bearing and distances, recovered old point of tamarack post. Recovered sugar maple BT scribed W-1/16, green and healthy. Recovered white birch 8", now a stump. Someone had cut the tree off above the scribing.

Description of monument and accessories I established to perpetuate the original location of this corner.
Replaced old point with 1-1/2" O.D. galvanized iron pipe with brass cap stamped - S498
Established NBT - Elm 7" N720W 47.6 links
T37N, R11E

W-1/16 S | 23
S | 26
CPI-1975

Dated at Rhinelander, Wis., this 15th day of May, 1975.

Signature: *Philip T. Hansen* Title: Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)
Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M.

Joni Lange Kuehn
(Register of Deeds)

By: Deputy

3711230030