

CERTIFIED LAND CORNER RESTORATION



Index No.

**7-18**  
**7/18**

State of Wisconsin } ss.  
County of Oneida

I Philip T. Hansen, do hereby certify that on the 13th day of June, 1975, I found evidence of the WC-1/16 corner of Section 26 Township 37 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses.

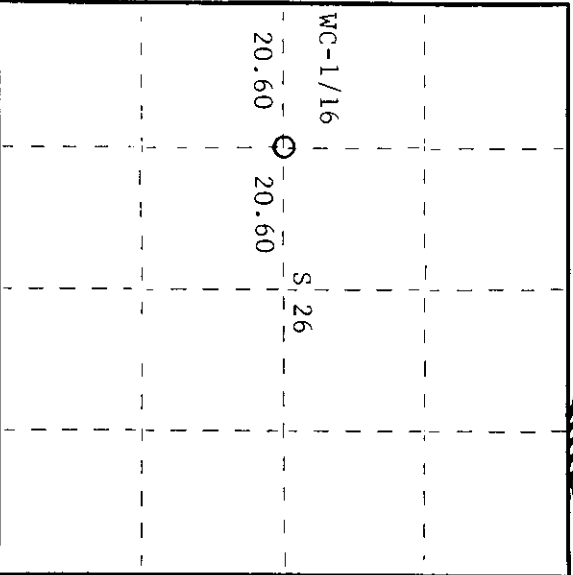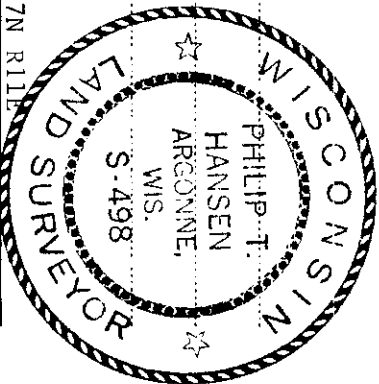

○ = Corner monument restored.

History of original corner establishment:


Corner established by H.C. Lawrence, Registered Land Surveyor, in 1947. From established  $6\frac{1}{2}$  corner, he set WC-1/16 corner equidistant between it and the  $W\frac{1}{2}$  corner, at 41.20 chains. Set a 5" cedar post, from which cedar 10" bears  $S84\frac{1}{2}W$  17 $\frac{1}{2}$  links, and tamarack stub 14" bears N61 $^{\circ}$ E 24 links.

Description of corner evidence found:

Recovered 5" cedar post, squared and scribed WC-1/16 S26, WC-1/16 S26, in poor condition.  
Recovered cedar 10"  $S84\frac{1}{2}W$  17.5 links, scribing still visible. (Now a 3' stub.)  
Recovered tamarack stub 14" N61 $^{\circ}$ E 24 links, fallen down and decayed. Scribing visible.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced 5" cedar post with 1 $\frac{1}{2}$ " O.D. iron pipe with 2" brass cap stamped - S498  
NBT's - white pine 12" N13 $^{\circ}$ E 89.6 links, scribed 1/16 BT T37N R11E  
Cedar 5" N46 $^{\circ}$ E 42.3 links, scribed 1/16 BT WC-1/16



Dated at Rhineland, Wis., this 9th day of July, 1975.

Signature: *Philip T. Hansen* Title: Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, hereby certifies that the within instrument was filed in this office for record on the 1st day of October, 1975, at 3:00 o'clock P.M.

*Doris Terage Tucker*  
(Register of Deeds)

By: Deputy