


State of Wisconsin

County of Oneida } ss.

I Philipp T. Hansen do hereby certify that on the 17th day of March 1978, I found evidence of the Quarter corner of Sections 33 & 34 Township 37 North, Range 11 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Glen Barker
Jim Claflin
Herb Wagoner

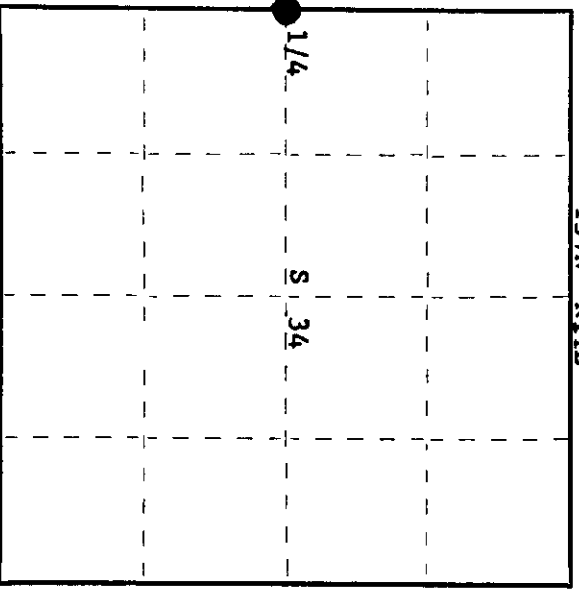

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, deputy surveyor, in 1859, from which tamarack 8" bears N 30° W, 12 links; tamarack 9" S 85° E, 18 links. Corner recovered by V. Maine, county surveyor, in 1935. Identified by old squared post and original BT, tamarack 8" N 30° W, 12 links, blown down but scribe marks very plain. Set 2 1/2" iron pipe and marked NBT - cedar 8" S 21° E, 18 links.

Corner recovered in 1952 by H.C. Lawrence, Registered Land Surveyor, set post along side Maine's iron pipe.
Made NBT - cedar 8" N 25 1/2° W, 22 links.

Description of corner evidence found:
Recovered Maine's 2 1/2" iron pipe with brass cap, stamped:
Projects 24" above ground. T37 R11
H.C. Lawrence's 5" cedar post, squared and scribed S33 - 1/4 S - S33 1 1/4 S34
S34 - 1/4 S - standing beside Maine's iron pipe. Recovered OBT's -
original tamarack 8" N 30° W, 12 links, now a rotted stump. Maine's
BT - cedar 8" (12") S 21° E (N69°E wrong quadrant 90°) 18 links,
scribed 1/4S. M

H.C. Lawrence's BT's - cedar 8" (9") N 25 1/2° W, 22 links (21 lks),
scribing grown over. cedar 12" S 40° E, 37 links, scribed 1/4S NBT.

Description of monument and accessories I established to perpetuate the original location of this corner.
As Maine's pipe is in perfect condition, left as we found it.

NBT's - cedar 10" S 2° W, 32.4 links, scribed 1/4 BT.
cedar 8" N 73° W, 61.9 links, scribed 1/4 BT.

Dated at Rhinelander, Wis., this 5th day of April, 1978.

Signature *Phillip T. Hansen* Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Registrar of Deeds, County of Oneida
instrument was filed in this office for record on the 10th day of April, 1978
at 10:30 o'clock A.M.

Debra Seeger Rueden
(Registrar of Deeds)

By _____ Deputy