

CERTIFIED LAND CORNER RESTORATION

Index No. **U-7**

State of Wisconsin

County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 20th day of September, 1977, I found evidence of the SC 1/16 corner of Section 29


Township 38 North, Range 10 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.


Resident witnesses:

Jif Clafflin

Hert Saponer

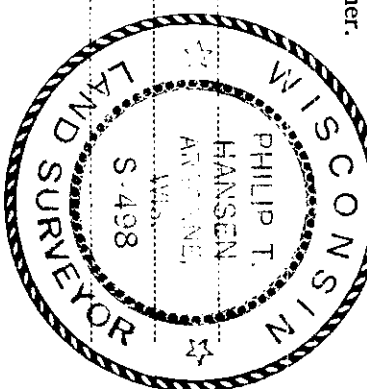

T38N P10E

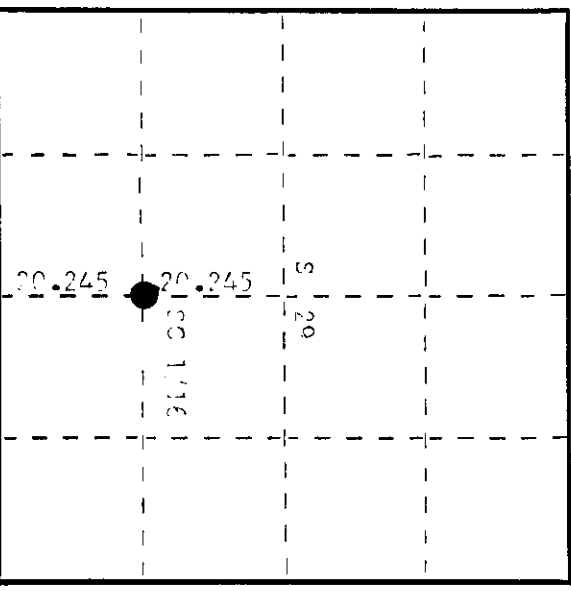

O = Corner monument restored.

History of original corner establishment:

Corner established by Goddard and crew, Risco Surveyors, in 1961. Ran the N-S and E-W 1/4 lines to establish the C 1/4 corner. Set C 1/4 corner at 20.245 chains intermediate between C 1/4 corner and S 1/4 corner. Marked WRTs - White Spruce 3" 866<sup>0</sup>, 42 links. Birch 5" 855<sup>0</sup>E, 53<sup>1</sup>/<sub>2</sub> links

Description of corner evidence found:

Recovered an square spruce post, not scribed, in poor condition. No evidence of any iron pins. Recovered 1 CRT - White Spruce 5" 866<sup>0</sup>, 23.0 links, only stump remains. White Birch 5" (on) scribe, 23.5 links, recovered 1/16 1/2 P.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced wood post with 1 1/2" iron pipe with 2" brass cap, stamped: Monument Projects 200' above ground. WRT - White 7" 855<sup>0</sup>E, 20.0 links, scribed 1/16 1/2 P.

T39N P10E  
SC 1/16 S 20  
CT-1977

Dated at Rhineland, Wis., this 27th day of September, 1977

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 22th day of October, 1977 at 9:15 o'clock A.M.

*Doris Verage Kuehn*  
(Register of Deeds)

By \_\_\_\_\_ Deputy

3810291020