


SEC. 2 T. 39 N. R. 7 W.

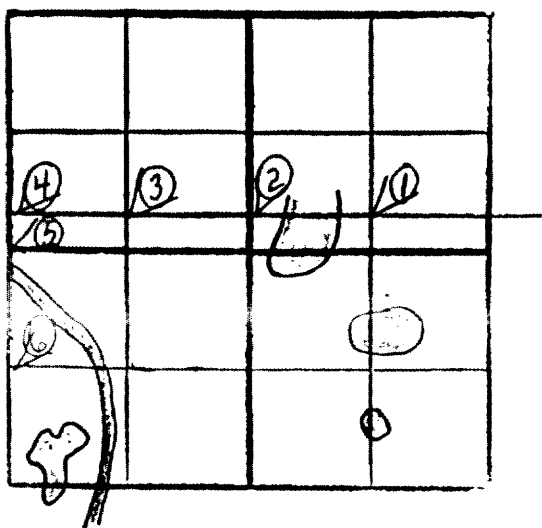

① N<sup>1</sup>/<sub>4</sub> NE<sup>1</sup>/<sub>4</sub> at 20.0435 set 3/4" iron pipe for 1/8 cor. on east edge of open marsh with high hill to east. Pin (copp.) 1/4" S 45° E - 0.446 ch. (Copp & Brunner 4/2/59)


Sound OR 9" N 32° E, PW 9" S 78° E 42.8', old stp 14" S 35° E Seymour, 12-12-80

② N<sup>1</sup>/<sub>4</sub> Sec 2 at 79.00 south of N<sup>1</sup>/<sub>4</sub> Sec 35-40-7 fell 5 1/2 ch west of 1/4 cor. OBT. BW 10" - N 16° E - 20 ch. New B.T. BW 12" - N 41° E - 12 ch (Vaughn 12/29/1900). No sign of OBT. or Vaughn's B.T. Set W.C.D. pipe for new 1/4 cor at 40.087. New B.T. Oak 8" - N 69° W - 0.403 ch.; PW 14" - N 82° E - 0.818 ch. (Copp & Brunner 4/2/59) See corner file

RECEIVED & FILED  
 On the County and State Files  
 APR 22 1989  
 BY: [Signature]  
 CCS File #

③ N<sup>1</sup>/<sub>4</sub> NW<sup>1</sup>/<sub>4</sub> at 20.043 set 1/2" iron pipe for 1/8 cor. New B.T. PN 7" - N 83° W - 0.588 ch. (Copp & Brunner 4/2/59)  
 Sound ip. 12-16-50 Seymour

DNW Cor. Sec 2 Howard R.R. iron in correct place & returns  
 73 PW O.B.T. Replaced iron with W.C.D. pipe. BT position - MH 5"  
 S 43° E - 0.570 ch.; MH 6" - S 31° W - 0.355 ch.; New BT. BW 6" - N 72° W -  
 0.363 ch. (Copp & Bruner 11/10/60)  
 See corner file

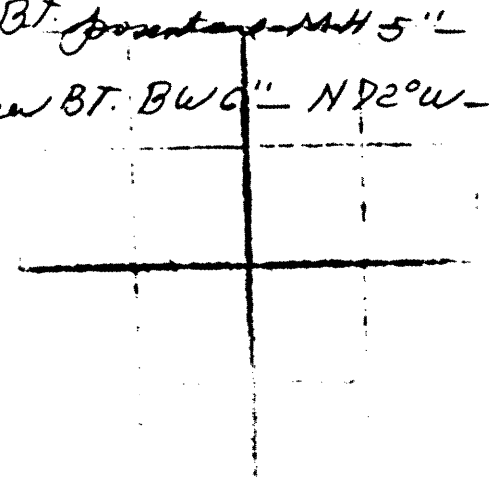

SW 1/4 Sec 2 Set W.C.D. pipe for new 1/4 cor, P 4.049 south of NW cor &  
 40.284 north of SW cor. PW 8" - N 81° W - 0.150; PW 6" - N 62° E - 1.020 ch.  
 Hassler's 1/4 cor is NW 14 1/2 ± ch. (Bennett 1/5/61)  
 See corner file

SW 1/4 SW 1/4 at 20.142 set 1/8 cor. PW 9" - N 88° W - 1.280 ch.; PW 7"  
 N 53° W - 1.20 ch. Hassler's 1/8 is NE 64 ± ch. (Bennett 1/5/61)  
 Set new 1/16 corner N 2° 02' E <sup>47.08'</sup> of Hassler's capped pipe. New BT<sup>s</sup>  
 in swamp. PW 14" S 43° W 90.35'; PW 12" N 54° W 80.90'  
 Seymour, 8/16/84