

CERTIFIED LAND CORNER RESTORATION



Index No. E-17

State of Wisconsin

County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 9th day of November, 1978, I found evidence of the Section corner of Secs. 2, 3, 10 & 11 Township 35, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:  
Jim Claffin  
Herb Wagoner

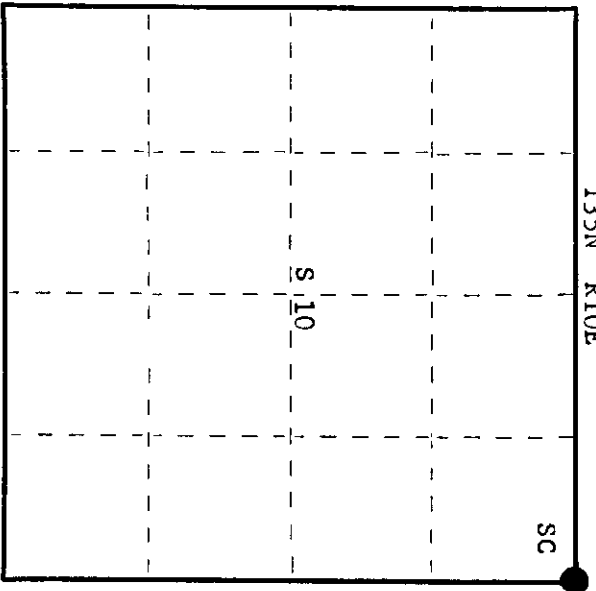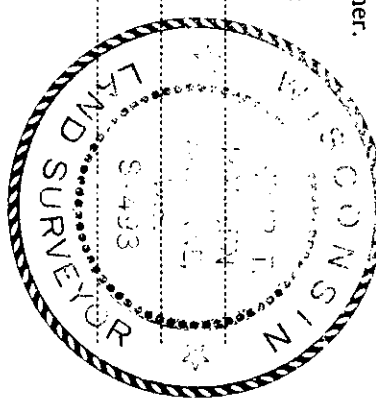

○ = Corner monument restored.

History of original corner establishment:

Original corner established by James L. Nowlin, Deputy Surveyor, in 1865 from which Birch 12" bears N 14° E, 24 links; Aspen 10" bears N 55° W, 50 links.

Corner established by double proportion by Ripco surveyors and H.C. Lawrence, Registered Land Surveyor, in 1960.

Marked NBT's - Hemlock 11" S66°W 59 links  
Cedar 7" S24°E 19 1/2 links  
Maple 5" N26°E 3 1/2 links

Description of corner evidence found:

Recovered Ripco's 2" iron pipe with 3" square brass cap and H.C. Lawrence's 6" squared cedar post standing beside it. Post scribed S2, S3, S10, S11.

Recovered OBT's - Hemlock 11" S66°W (S70°W), scribing legible.

Cedar 7" S24°E, 19.5 links, now a dead snag  
Maple 5" N26°E (N40°E) 3.5 links

Ripco cap stamped:  
Monument projects 2 1/2' above ground.  
T35N R10E  
S3 + S2  
S10 + S11  
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.

Monument left in place as recovered.

Marked NBT's -  
Maple 8" N72°W 65.0 links  
Sugar 7" N16°E 69.1 links, scribed SC-BT

Dated at Rhinelander, Wis., this 27th day of November, 1978

Signature Phillip T. Hansen, Title Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida  
Instrument was filed in this office for record on the 4th day of December, 1978  
at 1:35 o'clock P. M.

Dore Berger Fuchs  
(Register of Deeds)

By: \_\_\_\_\_ Deputy

3510030000