

CERTIFIED LAND CORNER RESTORATION

Index No. D-5

State of Wisconsin

County of Oneida } ss.



I Phillip T. Hansen, do hereby certify that on the 20th day of June, 1977, I found evidence of the S. 1/16 corner of Sections 5 and 6 Township 35, North, Range 10 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Claflin

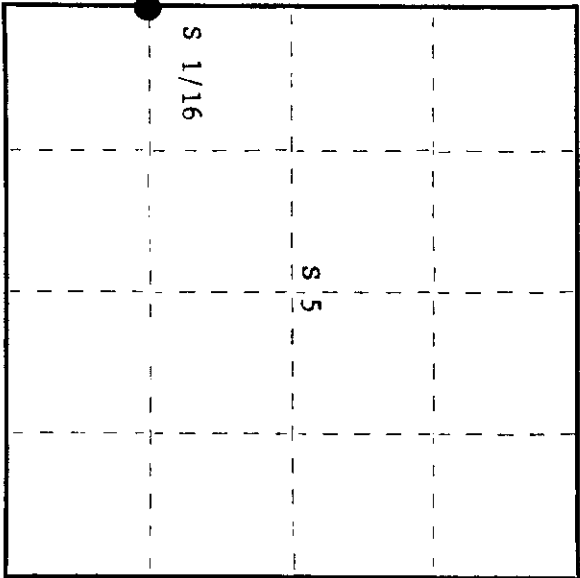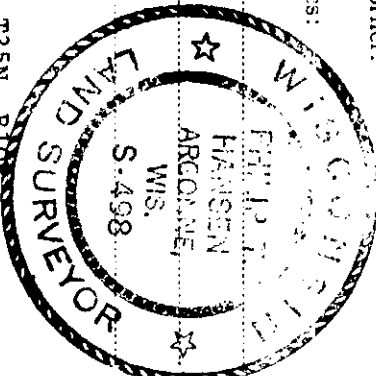

○ = Corner monument restored.

History of original corner establishment:

Corner established by N. Loftus, Ripco surveyor, in 1956. Ran random line north from section corners 5, 6, 7 and 8 39.93 chains to close out 1.00 chain west of Vaughan's 1/4 corner. Set S 1/16 at 9.965 chains intermediate. Marked NBT's - B.Spruce N35°W 45 links, tamarack 4" S22°E 29-1/2 links Corrected bearing N 1° 41' W.

Description of corner evidence found:

Recovered 1-1/2" iron pipe with 2" brass cap in good condition. Cap stamped: Monument project 24" above ground. Recovered OBT's - B.Spruce 5" (6") N35°E 45.0 links (44.8 links). Tamarack 4" (5") S27°E 29.5 links. scribbling grown over.

S 1/16
56 + 55
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.

Left monument in place as recovered. No additional accessories established.

Dated at Rhineclander, Wis., this 11th day of February, 1980

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
Instrument was filed in this office for record on the 10th day of March, 1980
at 9:10 o'clock A.M.

Daniel George Kuehn
(Register of Deeds)

By Daniel George Kuehn Deputy

3510061000