

CERTIFIED LAND CORNER RESTORATION



Index No. **V-25**

State of Wisconsin } ss.
 County of Oneida

I Phillip T. Hansen, do hereby certify that on the 5th day of April, 1976, I found evidence of the Section corner of S25 - 30 - 31 - 36 Township 35, North, Range 10 and 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker
Jim Laflin
Herb Wagoner

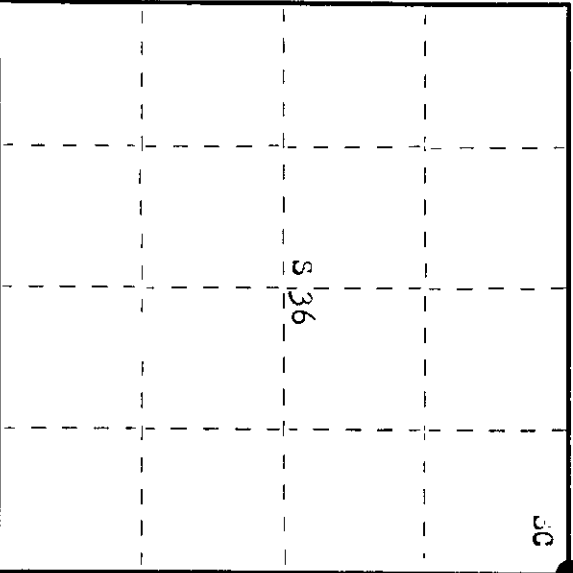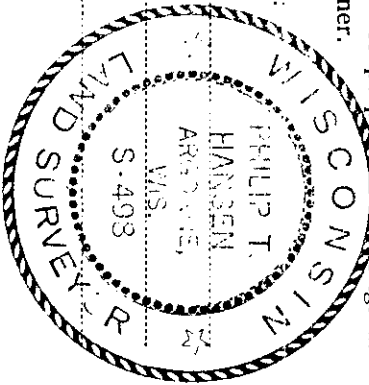

○ = Corner monument restored.

History of original corner establishment: Original Corner established by Hiram C. Fellows, Deputy Surveyor, in 1859, from which Tamarack 10" bears S 67° W 8 lks, Tamarack 10" bears N 29° W 10 lks, Tamarack 10" bears N 27° E 11 lks, cedar 8" bears S 79° E 12 lks. Corner recovered by D.H. Vaughan, County Surveyor, in 1907. Recovered original trees. Set new post and marked NBT - Tamarack 14" N 11° E 37 lks. Corner recovered and restored by H.C. Lawrence, Registered Land Surveyor, in 1957. Set new post and marked NBTs - Tamarack Stump 14" N 21° W 38 lks, W. Birch 9" S 14° E 26 lks. True bearing of line N 88° 03' E.

Description of corner evidence found:

Recovered 6" cedar post, squared and scribed S30, S31, R10E, S25 T35N, in very poor condition. Also an old squared cedar post lying beside it.
 Recovered NBT - W. Birch 9" (12") S 14° E (S 11° E) 26 lks (26.3 lks) scribed S31 BT.
 Tamarack 10" N 57° E 11 lks, now a decayed stump.
 Tamarack 14" N 21° E 38 lks, scribed BT - Decayed stump.

Description of monument and accessories I established to perpetuate the original location of this corner.
 Replaced 6" cedar post with 2 1/2" iron pipe with brass cap stamped.
 Pipe projects 2 ft. above ground. Placed rock cairn around base.
 NBTs - Cedar 6" Due North 19 lks, scribed S3 BT.
 Cedar 8" S 73° E 35.2 lks, scribed S3 BT.
 Cedar 8" S 32° E 31.3 lks, scribed S3 BT.
 Pipe and BTs painted blue.

24.98
 T35N R
 10 Sec 30 11
 36 31
 SPT-1976

Dated at Rhinelander, Wis., this 6th day of July, 1976.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Registrar of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 23rd day of July, 1976 at 10:00 o'clock A.M.

Alvin W. Straupe-Kuehn
 (Register of Deeds)

By: _____ Deputy

3510250000