

CERTIFIED LAND CORNER RESTORATION



Index No. **C-23**

State of Wisconsin

County of Oneida } ss.

I, Philip T. Hansen, do hereby certify that on the 22nd day of May, 1975, I found evidence of the C-1/4 corner of Section 1, Township 35 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

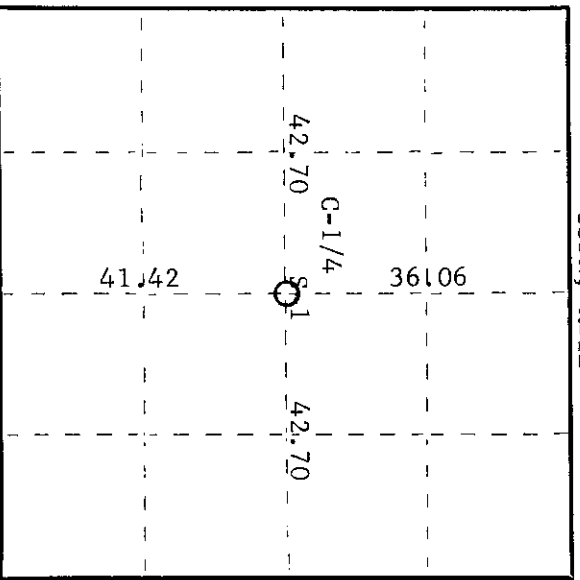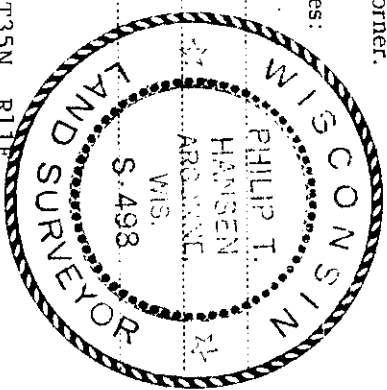

○ = Corner monument restored.

History of original corner establishment:
Corner established by H.C. Lawrence, Registered Land Surveyor, in 1957 during his retrace-ment survey.

He ran the North-South and East-West 1/4 lines from restored and re-established corners. Set a 4" tamarack post 42.70 chains East of West 1/4 post; 42.70 chains West of East 1/4 post; 41.20 chains North of S-1/4 post; and 36.06 chains South of N-1/4 post. It was a coincidence that the 1/4 post was set equidistant from the East and West 1/4 post. Witnessed by white birch 6", North, 18 1/2 links and black cherry 8", N76°W, 50 links.

Description of corner evidence found:

Recovered 4" tamarack post, squared and scribed C-1/4S S1, C-1/4S S1, in poor condition. Post had been broken off by loggers. Was able to locate the point in the ground. Bearing trees had been cut during logging operations but stumps remained.

BT's - White birch 6" North 18.5 links
Black cherry 8" N76°W 50.0 links

Description of monument and accessories I established to perpetuate the original location of this corner.
Replaced point of broken post with 2 1/2" iron pipe with brass cap stamped -

Established NBT's - Black cherry 6" N1°W 71.8 links
White birch 5" S78°E 28.2 links scribed 1/4 BT C-1/4 S1

T35N, R11E
CPI-1975

Dated at Rhinelander, Wis., this 9th day of June, 1975

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, at 300 o'clock P.M. 1st day of October, 1975
I hereby certify that the within

Louise Verage Kuehn
(Register of Deeds)

By Deputy

3511012020