

CERTIFIED LAND CORNER RESTORATION

Index No. **E-6**

State of Wisconsin }
 County of Oneida } ss.

History of original corner establishment:

H.C. Lawrence, registered land surveyor, recovered an old cedar post in 1954 when he ran his line N 11° W from the N 1/16 previously recovered. Set 2" cedar post and marked 1975 - square 5" x 15" x 15 links and double square 8" x 45" x 29 links.

Description of corner evidence found:

recovered Lawrence's 4" cedar post, squared and scribed . 1/16 25, . 1/16 28. Also an old 3" squared cedar post, both were laying down.
 recovered old post hole at end of Lawrence's post.
 recovered 1975 - square 5" (70) x 15" x 15 links.
 double square 8" (90) x 45" x 29 links, scribed 28 31.

Description of monument and accessories I established to perpetuate the original location of this corner.

replaced 4" wood post with 1 1/2" iron rod from the with 2" brass cap, stan ed:
 monument projects 18" above ground.
 BEI - square 3" x 56" x 37.7 links.

0498
 T351 ALL
 1/16 2 1/2
 OPI-1976



I, Philip T. Hansen, do hereby certify that on the 10th day of November, 1976, I found evidence of the N 1/16 corner of Section 5 & 8 Township 35 North, Range 11 West, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Clafflin

Herb Masoner

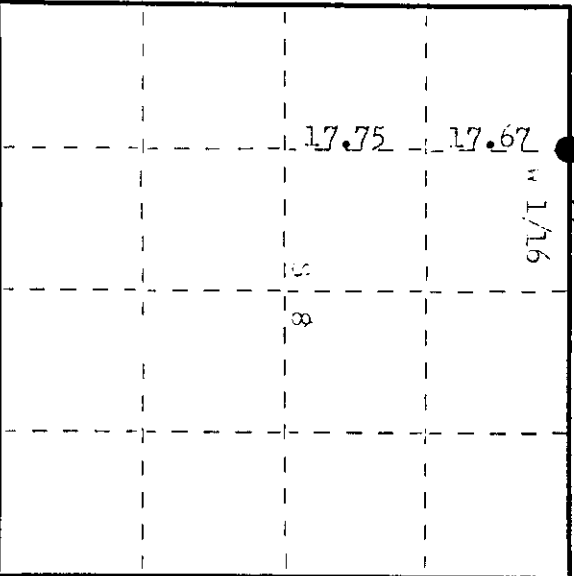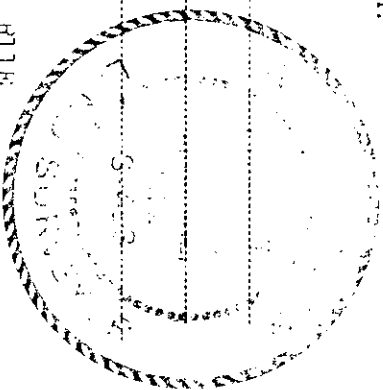

O = Corner monument restored.

Dated at Oneida, Wis., this 1st day of December, 1976.

Signature: *Philip T. Hansen* Title: Registered Land Surveyor Registration No. 2498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, ga day of December, 1976.
 instrument was filed in this office for record on the 20th day of December, 1976 at 2:00 o'clock P.M.

Doris Waage Kuehn
 (Register of Deeds)

By: *Joseph M. Bremer* Deputy

3511050030