



CERTIFIED LAND CORNER RESTORATION

Index No. **R-17**

State of Wisconsin }
 County of Oneida } ss.

I Phillip T. Hansen, do hereby certify that on the 10th day of June, 1978, I found evidence of the Section corner of Sec. 22, 23, 26 & 27 Township 35 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:
Jim Claflin
Herb Wagoner
John Masbaum

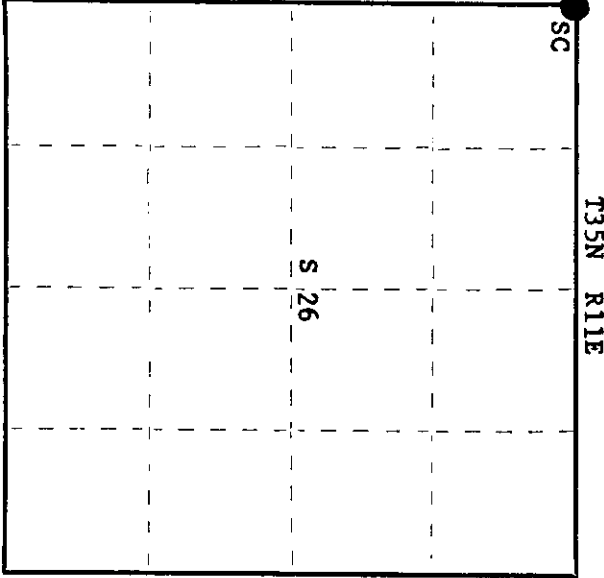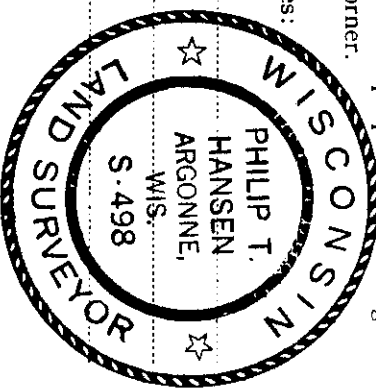

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1859, from which spruce 9" bears S43°E, 20 links and spruce 10" N52°W, 22 links.

Description of corner evidence found:

Recovered very old 6" squared cedar post. No scribing visible. Recovered old post point in muck.
 Recovered OBT - Tamarack 7" bears N2°E, 32.75 ft., scribing partially visible.

Description of monument and accessories I established to perpetuate the original location of this corner.
 Replaced old point with a 2 1/2" Bernitsen A-1 Federal Monument, aluminum with magnet installed in cap and base. Cap stamped:

Monument projects 10" above ground.
 Marked NBT's - Cedar 6" N86°E, 20.35 feet
 Black Spruce 6" S42°E, 25.43 feet
 Tamarack 6" S34°W, 64.0 feet
 all scribed S.C. BT.

Dated at Rhineland, Wis., this 23rd day of June, 1978.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)
 Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 26th day of June, 1978 at 11:35 o'clock a. M.

Doris George Fuchler
 (Registrar of Deeds)

By: _____ Deputy

3511220000