

CERTIFIED LAND CORNER RESTORATION

Index No. V-23

State of Wisconsin }
County of Ozaukee } ss.



I Phillip T. Hansen do hereby certify that on the 16th day of November, 1976, I found evidence of the Quarter corner of Section 25 - 36 Township 35, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Charlis

Herb Wagoner

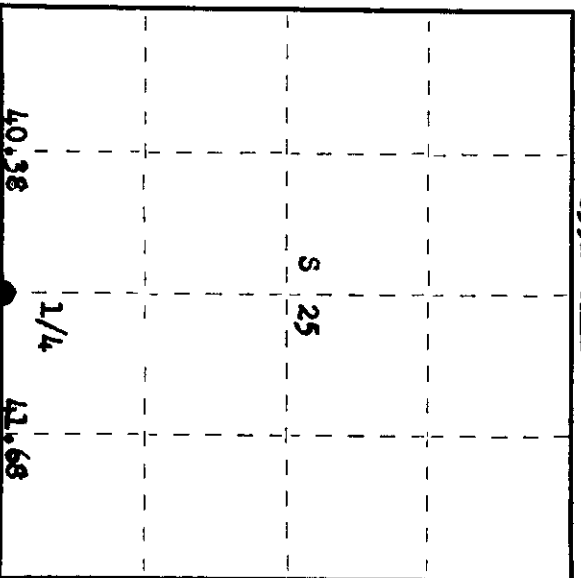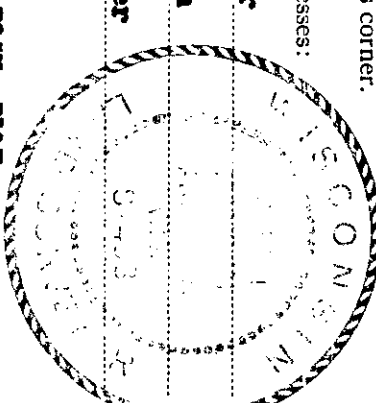

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1859, from which aspen 12" bears S 26° W 22 links and Sugar 9" bears N 71° E 27 links. Corner re-established by H.C. Lawrence, Registered Land Surveyor, in 1958. He established the corner on the extended N-S 1/4 line of Section 36, in line of old road west and in line of old fence north side of field to east. Set 5" cedar post and made MBTs - Oak 16" S 65° W 100 links. Maple 6" N 89° E 11 links.

Description of corner evidence found:

Recovered 5" cedar post, squared and scribed 1/4S S25, 1/4S S36, with rock cairn around base. Post recovered in fair condition. Corner sets in an old E-W road that is grown up with brush. An old field is south of the corner. Recovered MBTs - Oak 16" (18") S 65° W (S 68° W) 100 links, scribing partly visible. Maple 6" (8") N 89° E 11 links, scribing partly visible.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced cedar post with 2 1/2" iron pipe with brass cap stamped: Monument projects 2 1/2' above ground. MBT - Maple 7" N 63° W 50.9 links, scribed 1/4 BT.

T35N R11E
1/4 S 25
S 36
CPI-1976

Dated at Brine Lake, Wis., this 3rd day of December, 1976.
Signature: Phillip T. Hansen Title: Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Ozaukee.
Instrument was filed in this office for record on the 24th day of December, 1976 at 1:00 o'clock P. M.

Ann Marie Kucharski
(Register of Deeds)

By: _____ Deputy

000551153