

State of Wisconsin

County of Oneida

ss.

I Phillip T. Hansen

do hereby certify that on the 29th day

of November 19 76, I found

evidence of the Quarter

corner of Section 31 - 36

Township 35

North, Range 11 & 12 East, Fourth Principal Meridian,



as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Clarlin

Herb Wagoner

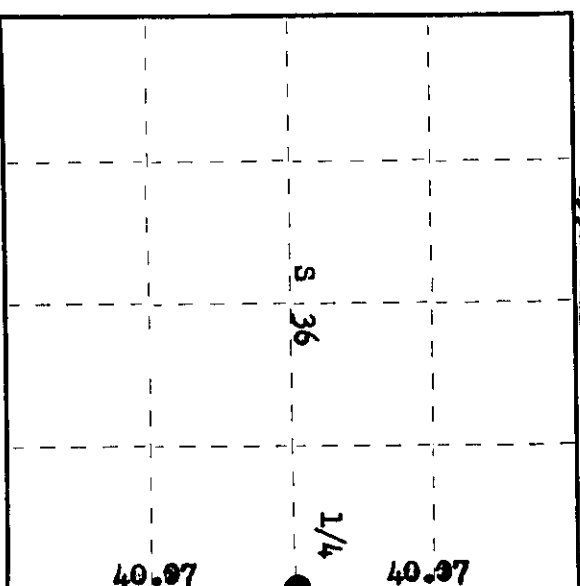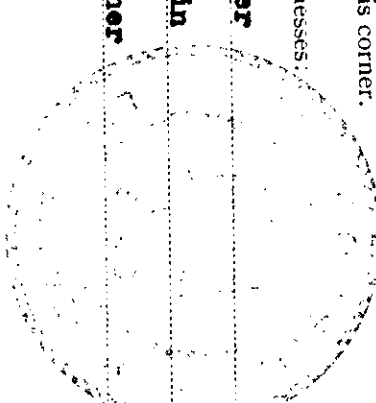

○ = Corner monument restored.

History of original corner establishment:

Original Corner established by Alfred Millard, Government Deputy Surveyor, in 1857 from which White Birch 8" bears N 51° E 19 links and White Birch 10" bears N 6° W 27 links. Corner restored by H.C. Lawrence, Registered Land Surveyor, in 1959. Ran a random line S 3° 00' E a distance of 80.14 chains to close out 47 links east of township corner. Set a 5" cedar post at 40.07 chains, 23 1/2 links west, old cedar BT. S 69° E 31 links, Old White Birch BT S 69° W 27 1/2 links. Marked NBTs - Cedar 12" N 73° W 29 1/2 links, Cedar 15" N 33° E 33 links.

Description of corner evidence found:

Recovered 5" cedar post, squared and scribed 1/4 S S31, 1/4 S R12E S36 R12E. Post was in fair condition.

There is an old cedar post, which bears west 9.5 links from Lawrence's. Recovered OBT - Cedar 10" S 69° E 31 links, scribing rotted out.

White Birch 8" S 69° W 27.5 links, now a 14' stub.

Cedar 12" N 73° W 28.5 links, scribed 1/4 S NBT.

Cedar 15" (16") N 33° E 33 links, scribed 1/4 S 31, NBT.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced cedar post with 2 1/2" Bernitsen A-1 Federal Monument, aluminum with magnet installed in cap and base. Cap stamped:

Monument projects 12" above ground.

NBT - Cedar 6" S 15° W 24 links, scribed 1/4 BT.

T35N R 11 S36 S31 R 12 E S498-1976

Dated at Rhinelander Wis. this 13th day of December 19 76

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498

County Surveyor, Registered Land Surveyor, or other duly authorized official

Office of Register of Deeds, County of Oneida 7th day of February 19 77. I hereby certify that the within instrument was filed in this office for record on the 14th day of M.

Terma Berage Tuohim (Register of Deeds)

By Joseph M. Borman Deputy