

CERTIFIED LAND CORNER RESTORATION

Index No. M-4

State of Wisconsin

County of ONEIDA } ss.

History of original corner establishment:
No evidence of any previous corner.


I, Glen Barker, do hereby certify that on the 25th day of January, 1984, ~~1984~~ 1984 Estab. ~~of~~ SE 1/16 corner of Section 18 Township 36, North, Range 6 East, Fourth Principal Meridian,

as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Description of corner evidence found:
Corner established by subdivision of the SE 1/16.
SE 1/16 sets 1335.95' of EC 1/16 and 1315.64' of SC 1/16.

Resident witnesses:

J. Claflin - R.L.S.
H. Wagoner

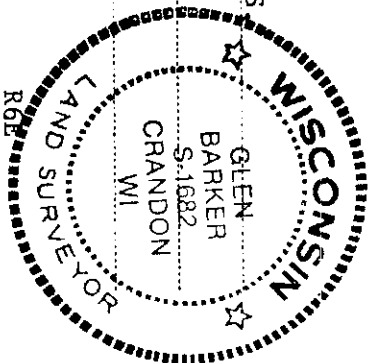


T36N

Description of monument and accessories I established to perpetuate the original location of this corner.
Set a 1" iron pipe with 2" diameter alloy cap stamped:
Monument projects 18" above ground.

Marked NBTs
Jack pine 7" N34E 85.65'
Aspen 7" S81W 18.07'

Scribed 1/16 - B.T.

SE 1/16 S 18
T36N R6E
CPI - 1984

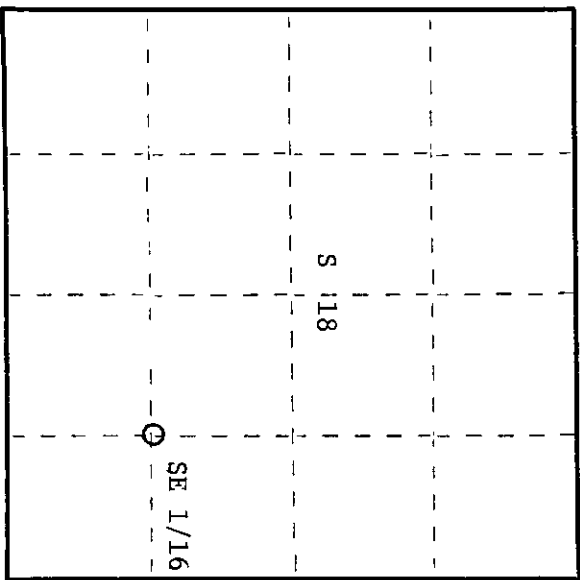

○ = Corner monument restored.

Dated at Rhineland, Wis., this 20th day of February, 1984.

Signature Glen Barker Title Registered Land Surveyor Registration No. S1682
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 23rd day of May, 1984 at 1:00 o'clock a. M.

Doris Verge Tucker
(Register of Deeds)

By: _____ Deputy

3606181010