

CERTIFIED LAND CORNER RESTORATION

Index No. **R-13**

History of original corner establishment: Original corner established by Wm. E. Dougherty, Deputy Surveyor, in 1863, from which tamarack 15" bears N50°E 32 links and tamarack 12" bears S8°W 13 links.

Corner recovered and restored by R. Hall, County Surveyor. Set a new 6" square cement monument projecting 10" above ground from which white pine 15" bears S24°E 125 links.

Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1948. Original tamarack BT S8°W was still there. Recovered Hall's white pine BT in good condition. Set new 6" squared post beside concrete monument in 1954.

Description of corner evidence found:
Recovered R. Hall's 6" square concrete monument in good condition. Also found Lawrence's 6" cedar post, squared and scribed S21, S22, S27 & S28 in good condition.

Recovered original tamarack 12" S8°W 13 links - now a decayed stump.
white pine 15" S24°E 124.5 links - blown down and dead.

Description of monument and accessories I established to perpetuate the original location of this corner. The concrete monument, being in good condition, was left as is with Lawrence's post beside it.

- NBT's - B. spruce 6" S 4°W 20.3 links scribed SC BT.
- B. spruce 7" N30°E 17.7 links scribed SC BT.
- B. spruce 8" N72°W 22.7 links scribed SC BT.

Bearings and distances made to concrete monument. Monument, post, and BT's painted blue.

Dated at Rhinelander Wis., this 3rd day of December, 1975

Signature: *Philip J. Steinhilber* Title: Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
at 1:00 o'clock P.M. I hereby certify that the within instrument was filed in this office for record on the 21st day of September, 1975

Signature: *Dona Wernicke*
(Register of Deeds)



By: Deputy

State of Wisconsin } ss.
County of Oneida

I, Philip T. Hansen, do hereby certify that on the 21st day of November, 1975, I found evidence of the Section corner of S21-22, 27, 28 Township 36, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker
Jim Clafflin

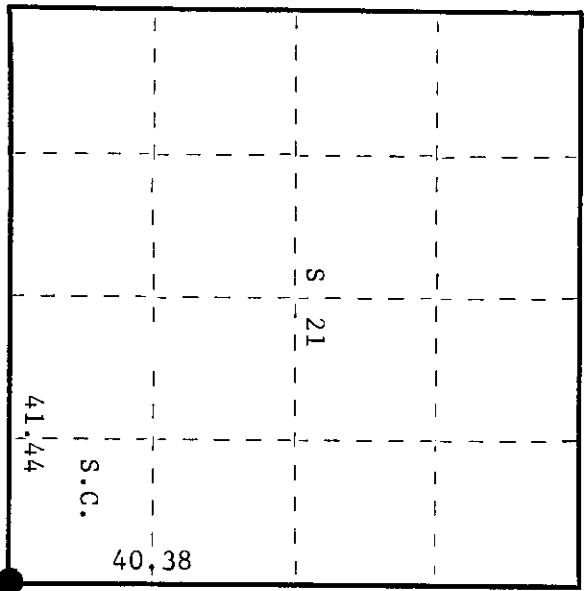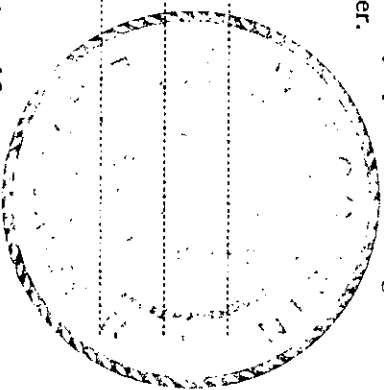

○ = Corner monument restored.

3610 210000