

CERTIFIED LAND CORNER RESTORATION

Index No. **V-19**

State of Wisconsin

County of Oncida } ss.



I Phillip T. Hansen, do hereby certify that on the 19th day of May, 19 77, I found evidence of the Quarter corner of Section 26 & 35 Township 36, North, Range 10 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker

Jim Charltn

Herb Wagoner

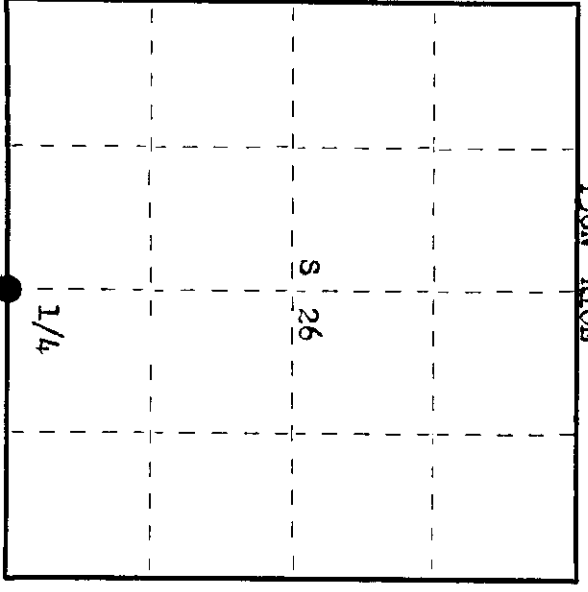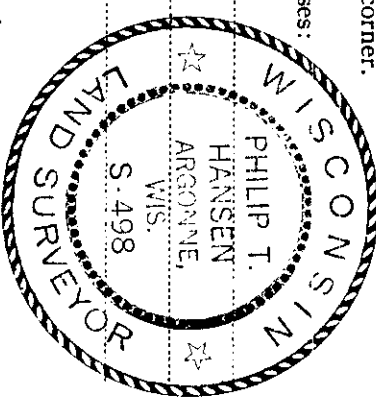

○ = Corner monument restored.

History of original corner establishment:

Original Corner established by Wm. E. Dougherty, Deputy Surveyor, in 1863 from which White Pine 20" bears S87°E, 525 links. No other near. Vaughan recovered this corner in 1905. Recovered White Pine S87°E, 525 links. H.C. Lawrence states that he recovered the corner and stump of white pine BT in 1947. Someone had set an iron pipe at the corner.

Description of corner evidence found:

Recovered 3 wooden posts and 2 1/2" iron pipe with brass cap, all down and under marsh grass. One was 4" squared cedar, possibly Vaughan's, badly decayed. Another 6" squared cedar post, H.C. Lawrence's 6" squared cedar post, scribed 1/4S S26 1/4S. Gap on iron pipe, unknown origin, was stamped S26, 1/4 S35 36-10.

Original White Pine stump S87°E 5.25 chains was searched for, but could not identify it as the remains of several white pine stumps was in evidence in the area.

Description of monument and accessories I established to perpetuate the original location of this corner.

- Set a 2 1/2" iron pipe with brass cap in place of what was believed to be the point of Vaughan's post. Gap stamped: S/98
- Monument projects 18" above ground. T36N R10E
- Drove support stakes beside iron pipe to firm it up and set the old iron pipe beside it. No trees available for BTs. 1/4 S 126
- Set two 1" iron pipes for witness monuments. 1/4 S 35
- #1 - North 30 links CPI-1977
- #2 - East 20 links -- both pipes project 24" above ground.
- Corner is approximately 3.5 chains west of Monico Creek.

Dated at Rhinelander, Wis., this 20th day of May, 19 77.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oncida at 10:00 o'clock AM, 19 77 day of June. I hereby certify that the within

Dorcas Urzaga Kuehn
(Register of Deeds)

By..... Deputy

3610260026