

CERTIFIED LAND CORNER RESTORATION


Index No. **78**

State of Wisconsin


County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 12th day of September, 1975, I found evidence of the EC-1/16 corner of Section 29, Township 36 North, Range 10E, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

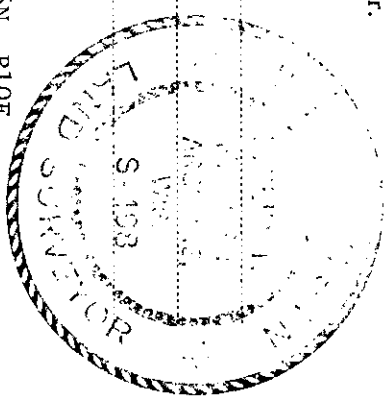

T36N, R10E

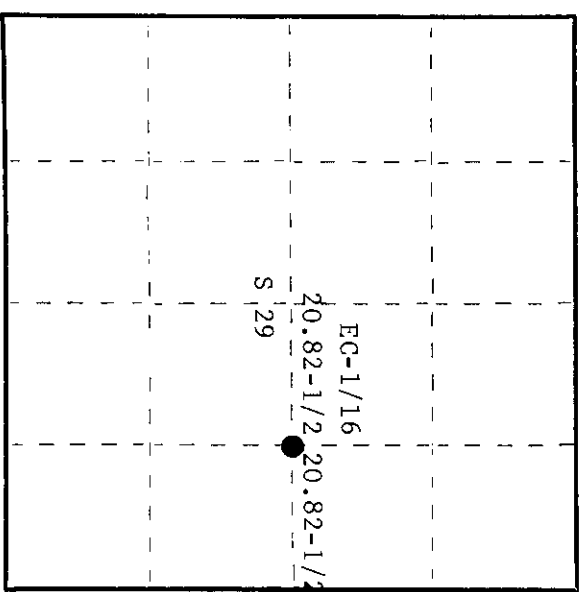

○ = Corner monument restored.

History of original corner establishment:

Corner established by H.C. Lawrence, Registered Land Surveyor, in 1947 from D.H. Vaughan's C-1/4 corner which he recovered intact. He ran N89°30'E, a distance of 41.65 chains to intersect the east line at a point 31 links north of 1/4 corner.

Set EC-1/16 corner equidistant at 20.82-1/2 chains, 15-1/2 south of random line. Marked W. pine 6" S30°E 24-1/2 links.

Description of corner evidence found:

A 6" decayed red pine tree, squared and scribed. The tree had rotted off at ground level. Someone's scribe marks visible but not readable.

Recovered OBT. White pine 6" (1 1/2") S30°E 24.5 links. Top scribing grown over. Bottom scribed BT.

Description of monument and accessories I established to perpetuate the original location of this corner. Replace down, squared red pine with 1-1/2" OD iron pipe with 2" brass cap stamped -

NBT White pine 9" S57°W 42 links Scribed 1/16 BT S498 T36N R10E

EC-1/16 S 29

CPI-1975

Dated at Rhinelander, Wis., this 22nd day of September, 1975.

Signature: *Philip T. Hansen* Title: Registered Land Surveyor Registration No. S-498 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida. I hereby certify that the within instrument was filed in this office for record on the 17th day of November, 1975, at 10:00 o'clock P.M.

Signature: *Louis Jerome Kuehn* (Register of Deeds)

By: Deputy

3610292010