



CERTIFIED LAND CORNER RESTORATION

Index No. E-24

State of Wisconsin }  
 County of Oneida } ss.

I, Philip T. Hansen, do hereby certify that on the 12th day of December, 19 74, I found evidence of the E-1/16 corner of S1 - S12 Township 36, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

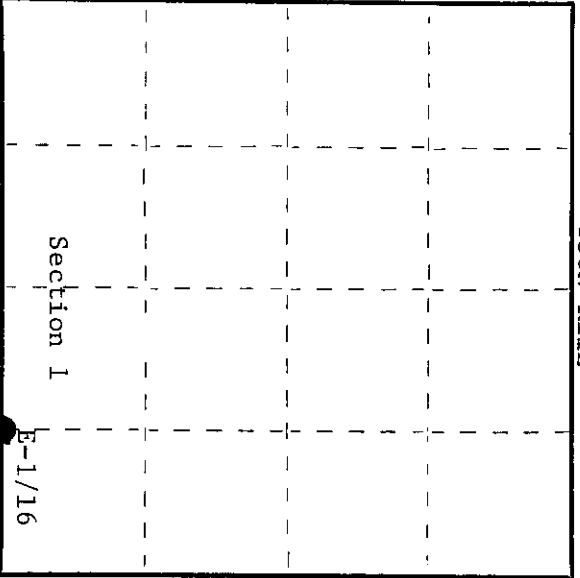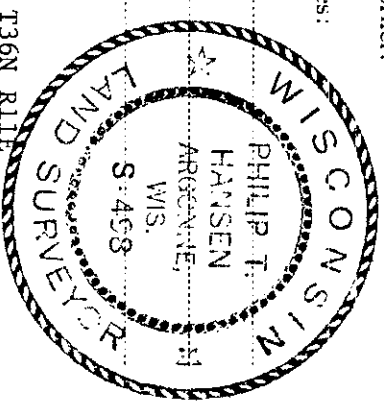

○ = Corner monument restored.

History of original corner establishment:

Original corner established by B.F. Dorr in 1898. H.C. Lawrence retracement survey of 1957 states he recovered this corner and set a new cedar post. Also set B.T.'s.

Maple	S17 $\frac{1}{2}$ W	14 $\frac{1}{2}$ links
White pine 24"	N84W	32 $\frac{1}{2}$ links
		Scribed E-1/16 S1.

Description of corner evidence found:

Recovered H.C. Lawrence's cedar post, squared and scribed S1 E-1/16 S12 E-1/16 in fair condition.

White pine 24"	S84W	32 $\frac{1}{2}$ links	Scribed E-1/16 S1 N.B.T.
Sugar stump	S20W	14 $\frac{1}{2}$ links	

Description of monument and accessories I established to perpetuate the original location of this corner.

Set 1" x 5' galvanized iron pipe with brass cap stamped:

N.B.T.	Hemlock 10"	S30E	28 links	S498
				T36N R11E



CPI-1974

Dated at Rhineland, Wis., this 16th day of January, 19 75.

Signature Philip T. Hansen Title Registered Land Surveyor Registration No. S-498  
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 19 75 at 3:00 o'clock M.

Tonia Bernage Tuerlin  
 (Register of Deeds)

By \_\_\_\_\_ Deputy