


CERTIFIED LAND CORNER RESTORATION


Index No. H-9

State of Wisconsin } ss.
 County of Oneida

I Phillip T. Hansen, do hereby certify that on the 27th day of February, 1975, I found evidence of the S-1/16 corner of Sections 8 and 9 Township 36 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

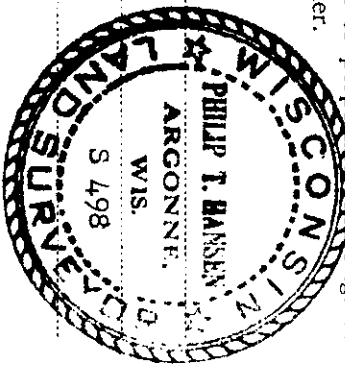

Resident witnesses:

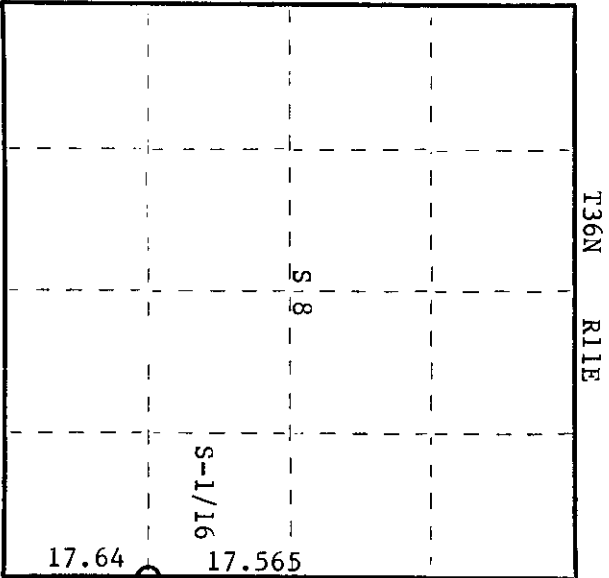

History of original corner establishment:
 Original corner established by D.H. Vaughan, County Surveyor, in 1907.

Spruce 7" N30°E 22 links
 Cedar 7" N88°E 9½ links

Corner recovered by H.C. Lawrence, Registered Land Surveyor, during his retracement survey in 1936. Recovered BTs - spruce stump N30°E, 22 links, and cedar 7", down but scribe visible. Set new cedar post in old hole and established NBTs - viz, white pine 14", N30°W, 48 links; white pine stump 20", N83½°E, 22 links.

Description of corner evidence found:

Recovered H.C. Lawrence's 4" cedar post, squared and scribed S8 S-1/16, set in rock carron. Stake found in poor condition. Also found remnants of old squared stake, probably Vaughan's.

Recovered BTs - white pine 14", N30°W, 48 links scribed S-1/16 and white pine stump 20", N83½°E, 22 links.

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced old wooden post with 1-1/4" OD x 5' galvanized iron pipe w/2" brass cap, stamped -

NBTs - black spruce 8" S76°E 85 links scribed 1/16 BT

S498
 T36N R11E
 S8 S9
 S-1/16
 CPI-1975

Dated at Rhineland, Wis. this 10th day of June, 1975.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P. M.

Doris Savage Trueland
 (Register of Deeds)

By: _____ Deputy