

CERTIFIED LAND CORNER RESTORATION



Index No. **G-13**

State of Wisconsin

County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 3rd day of December, 1974, I found evidence of the Quarter corner of 9 and 10 Township 36, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

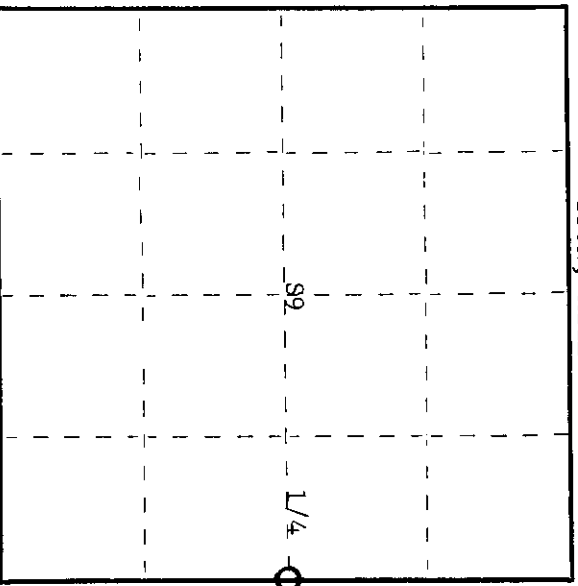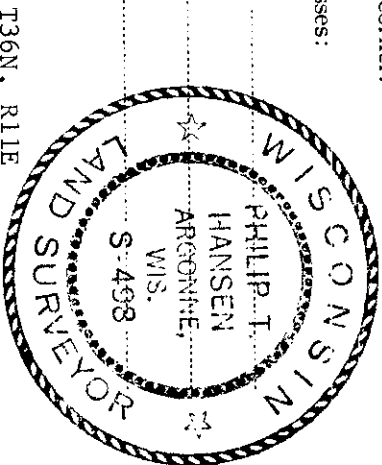

O = Corner monument restored.

History of original corner establishment:

Quarter corner set by D.H. Vaughan in 1912.  
 Birch 12" S48W 47 links  
 Birch 14" S1-1/2E 70 links  
 Corner recovered by H.C. Lawrence, Registered Land Surveyor, during his retracement survey in 1947. His notes state that he found the stumps of Vaughan's BT's from which he set a new 5" cedar post.  
 Established BT's - viz - White pine 14" S65E 61 1/2 links  
 White pine stump 18" N50E 32 1/2 links

Description of corner evidence found:

Recovered H.C. Lawrence's 5" cedar post, squared and scribed S9 1/4; S10 1/4 in fair condition. Also found a 4" cedar post, very poor condition. Someone had placed a 2-1/2" iron pipe beside the other posts.  
 Recovered Lawrence's BT's - White pine 14" S65OE 61 1/2 links  
 White pine stump 18" N50OE 32 1/2 links

Description of monument and accessories I established to perpetuate the original location of this corner.

Replaced wooden posts with 2-1/2" x 5' galvanized iron pipe with brass cap stamped -

NBT - Red maple 6" S34W 18 links

S498  
T36N, R11E

1/4 S9 | S10

CPI-1974

Dated at Rhineland, Wis., this 16th day of June, 1975.

Signature Phillip T. Hansen Title Registered Land Surveyor Registration No. S-498  
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M.

Dorrie Virginia Kunkel  
 (Register of Deeds)

By \_\_\_\_\_ Deputy

3611092000