

CERTIFIED LAND CORNER RESTORATION

Index No. N-8

History of original corner establishment:

Corner established by N. Loftus, Ripco Surveyor, in 1958. Ran line east from section corner 17, 18, 19 and 20, 84.93 chains to close out 1.21 chains north of section corner 16, 17, 20 and 21.

Established 1/4 corner at 42.46 1/2 chains at corrected bearing S 89° 11' E. Established E 1/16 at 63.69-3/4 chains intermediate.

Marked NBT's -
Maple 5" S83°W 32 1/2 links
Maple 4" N45°E 17 1/2 links

Description of corner evidence found:

Recovered Ripco's 3/4" iron pipe with 3" square brass cap in good condition, projecting 24" above ground. Cap stamped:

Recovered CRT's -
Sugar 5" (7") S83°W (S89°W) 32.5 links
Sugar 4" (5") N45°E 17.5 links
scribing grown over
E 1/16 S17
S20
RIPCO

Description of monument and accessories I established to perpetuate the original location of this corner.

Monument left in place as recovered.
No additional accessories established.

State of Wisconsin



County of Oneida } ss.

I, Philip T. Hansen, do hereby certify that on the 20th day of April, 1979, I found evidence of the E. 1/16 corner of Section 17 & 20 Township 36, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Jim Claflin

Herb Wagoner

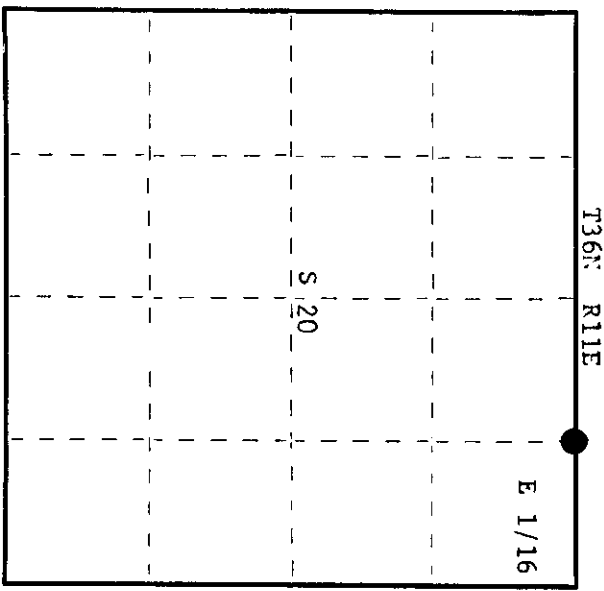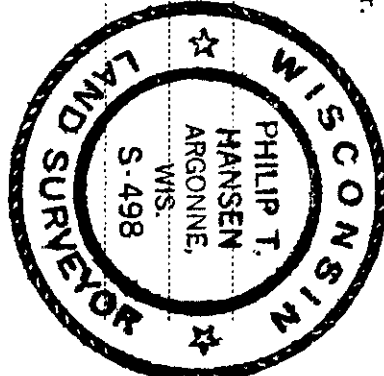

○ = Corner monument restored.

Dated at Rhineland, Wis., this 24th day of April, 19 79

Signature: Philip T. Hansen Title: Registered Land Surveyor Registration No. S-498
(County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida, I hereby certify that the within instrument was filed in this office for record on the 14th day of May, 19 79 at 1:30 o'clock P. M.

Terese Leage Kuehn
(Register of Deeds)

By: _____ Deputy

010007119M