

CERTIFIED LAND CORNER RESTORATION



Index No. P-18

State of Wisconsin }  
 County of Oneida } ss.

I, Philip T. Hansen, do hereby certify that on the 27th day of July, 1976, I found evidence of the Section 23 corner of Section 23, Township 36 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

Glen Barker  
 Jim Clafflin  
 Herb Larson

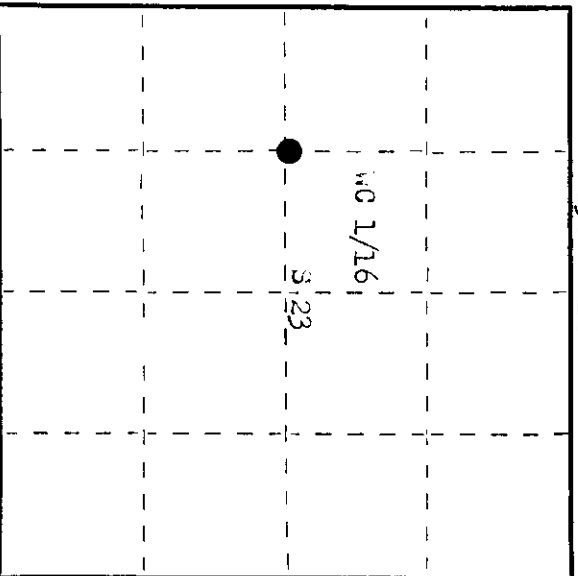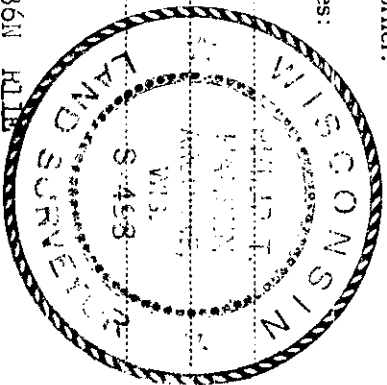

○ = Corner monument restored.

History of original corner establishment:

Corner established by B.F. Dorr, County Surveyor, in 1906. Set post and marked BT - Sugar 10" S 63° W 3 links.  
 Corner recovered by H.C. Lawrence, registered Land Surveyor, in 1953, while cruising in this area.  
 Set post from recovered Sugar 10" S 63° W 3 links.  
 Marked BETs - Sugar 12" N 82° W 86 links and Yellow Birch 12" N 87° W 74 links.

Description of corner evidence found:

Recovered 5" henlock post, squared and scribed. C 1/16 S23 C 1/16 in poor condition. A large rock cairn had been placed around base.  
 Recovered Sugar 10" S 63° W 3 links (Dorr's) now dead. Lawrence had chopped the face out on this BT. Scribings visible.  
 Sugar 12" N 82° W 86 links, scribbing grown over.  
 Yellow Birch 12" N 82° W 74 links, scribbing grown over.

Description of monument and accessories I established to perpetuate the original location of this corner.  
 Replaced henlock post with 1 1/2" OD iron pipe with 2" brass cap stamped.  
 Monument projects 24" above ground.  
 No additional accessories established.  
 Monument and BT's painted blue.  
 Corner sets 0.5 chains north of pipe line.

3498  
 T36N R11E  
 WC 1/16 S 23  
 GPI-1976

Dated at Rhinelander, Wis., this 23rd day of August, 1976.

Signature Philip T. Hansen Title registered land surveyor for Registration No. 3-498  
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida  
 Instrument was filed in this office for record on the 31st day of August, 1976, at 2:10 o'clock P.M.  
 I hereby certify that the within instrument was filed in this office for record on the 31st day of August, 1976.

Gene George Fuchner  
 (Register of Deeds)

By \_\_\_\_\_ Deputy

3611232030