

U.S. PUBLIC LAND SURVEY MONUMENT RECORD

State of Wisconsin

County of: **ONEIDA** }

I, DANIEL K. PLEOGER, do hereby certify that on the 29th day of March, 2000

I found evidence of the corner of sections 25, 26, 35, 36


Township **36 North**, Range **11 East**, Fourth Principal Meridian, as described hereon; and made new accessories as described hereon to perpetuate the original location of this corner:

Description of original monument and accessories and subsequent restorations:

The corner of sections 25, 26, 35, 36 was perpetuated by Phil Hansen on May 28, 1975. See his Certified Land Corner Restoration.

Hansen set a 1 1/2" iron pipe flush for the corner. Set 2 1/2" iron pipe with brass cap for a witness 50 links north.

BTs: white birch 5" N22E 82.4 lks.
White birch 7" N81E 157 lks.

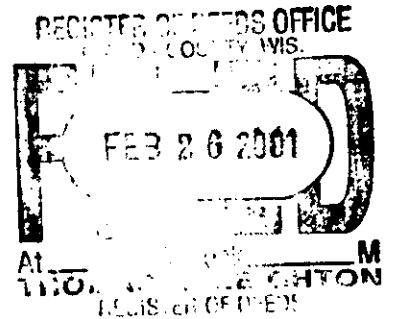

EVIDENCE FOUND AND JUSTIFICATION FOR LOCATING CORNER AS SHOWN:

I recovered a 1 1/2" iron pipe 12" below the road surface. Found Hansen's witness monument and both birch bearing trees. Could not get Hansen's ties to check exactly. The found iron pipe is in line with the 1/16 corner and 1/4 corner to the west.

I accepted the position of the found iron pipe.

I referenced the corner as shown on the drawing on the reverse side.



T36N R11E

	S	26	

Resident witnesses

Dated at Winter, Wisconsin, this 4th day of January, 2001.

Signature *Daniel K. Pleoger* Title **Registered Land Surveyor**
Surveyors Registration No. **1537**

Office of _____ County of _____

I hereby certify that the within instrument was filed in this office for record on the _____ day of _____ 19____, and was filed in Book No. _____

Page No. _____ of County Records.

Signature _____ Title _____

Index No. V-21

3611260000

