

CERTIFIED LAND CORNER RESTORATION



Index No. **V-9**

State of Wisconsin

County of Oneida } ss.

I Philip T. Hansen do hereby certify that on the 10th day of July 1975, I found evidence of the Section corner of S28, S29, S32, S33 Township 36 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:

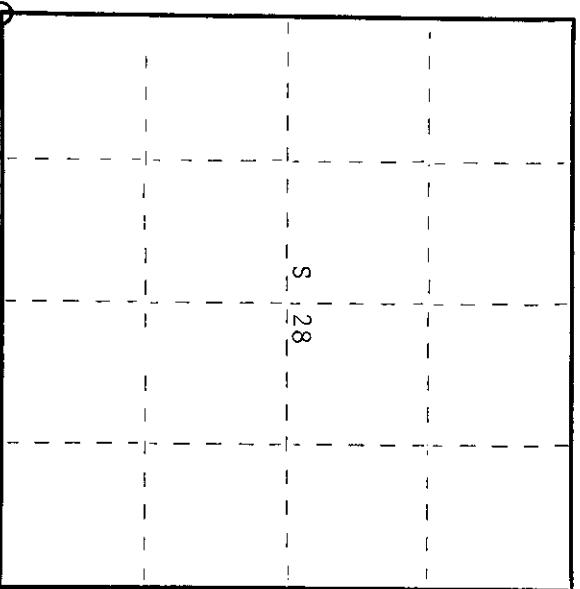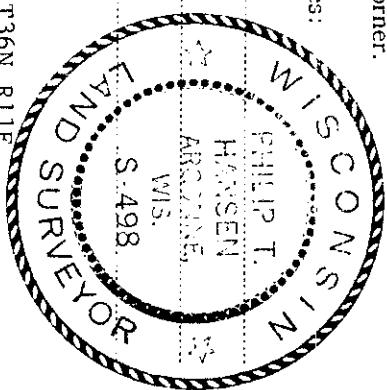

○ = Corner monument restored.

History of original corner establishment:

Original corner established by Wm. E. Dougherty, Gov. Deputy Surveyor, in 1859, from which tamarack 8" bears S38°E 8 links, and tamarack 9" bears N65°W 14 links. Corner recovered by H.C. Lawrence, Registered Land Surveyor, in 1955. He found two old corner stakes and original tamarack BT down but scribe marks okay. This bears S36½°E 8 links. The other tamarack BT N63°W, only the stump remains but no scribe marks visible.

He set a 6" cedar post in the hole of old post; made NBT. Tamarack stub 12" N50°E 8½ links, and tamarack stub 12" S10°E 16". He placed a cedar stake in center of ~~stake~~ BT stump evidence found:

Recovered 5" cedar post, squared and scribed S28, S29, S32, S33, in good condition. Also recovered two old cedar points in the muck beside the cedar post.
 Recovered OBT - tamarack stub 12" N50°E (N59°E) 8.5 links (9 links) Scribed S28.
 NBT - tamarack stub 12" S10°E (S6°E) 26 links Scribed S33 NBT.
 Original tamarack stump S36½°E 8 links Scribed S33 T36N R11E. (Removed old scribing for display purposes, it being 116 years old.)

Description of monument and accessories I established to perpetuate the original location of this corner.
 Replaced 5" cedar post with 2½" iron pipe with brass cap stamped -

NBT's - tamarack 7" S36°W 33.4 links Scribed SC BT. S498
 White birch 5" S47°E 43.4 links Scribed SC BT. T36N R11E

T36N R11E	S29	S28
	S32	S33
CPT-1975		

Dated at Rhineland, Wis. this 24th day of July 1975

Signature *Philip T. Hansen* Title Registered Land Surveyor Registration No. S-498
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida I hereby certify that the within instrument was filed in this office for record on the 1st day of October 1975 at 3:00 o'clock P.M.

Doris Verage Fuchs
 (Register of Deeds)

By: Deputy

3611290000