


CERTIFIED LAND CORNER RESTORATION

Index No. Y-13


State of Wisconsin } ss.  
County of Oneida }

I Daniel K. Plegger do hereby certify that on the 17 day of November 19 81 I ~~restored~~ ~~restored~~ of the S. 1/16 corner of Sections 33 & 34 Township 36 North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:



T36N R11E

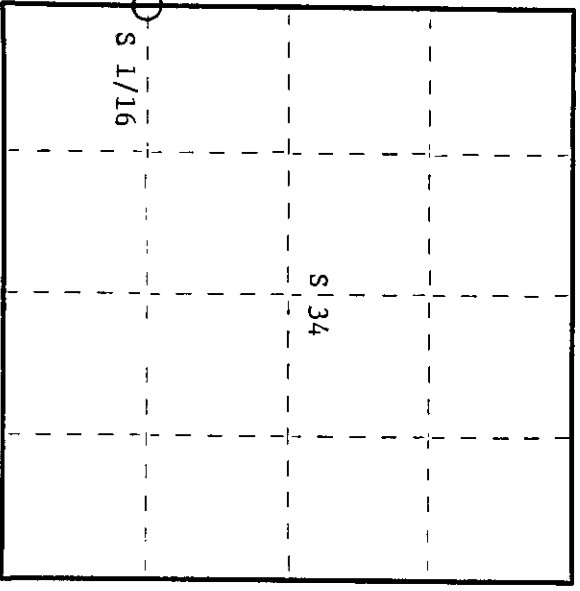

○ = Corner monument restored.

History of original corner establishment:

In 1953, H.C. Lawrence set a 4" squared cedar post for S 1/16 and marked BT - cedar 4" N44E 12 lks.

Description of corner evidence found:

Total distance from section corner 3-4-33-34 T35 & 36N R11E to 1/4 corner between sections 33 & 34 is 2649.367 ft. at bearing S0-09-03W. Set S1/16 1324.684 ft intermediate.

Description of monument and accessories I established to perpetuate the original location of this corner.

Set a 1/2" iron pipe with a 2" diameter aluminum cap stamped: S1537  
Monument projects 12" above ground T36N R11E  
B.T. - H.C. Lawrence's cedar 7" N41E 6.88 ft.

Scribed NBT - B.T. S 1/16 33 | 34  
Marked N.B.T. - Cedar 7" N80E 12.88 ft.  
Scribed 1/16 - B.T. S 1/16 33 | 34  
H.C. Lawrence's post bears west 1.40 ft. of new position. CPI - 1981

Dated at Rhinelander Wis. this 8th day of January 1982

Signature David K. Plegger Title Registered Land Surveyor Registration No. 1537  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)  
Office of Register of Deeds, County of Oneida  
Instrument was filed in this office for record on the 24th day of March 1982  
at 10:35 o'clock M.

Done Terence Tucka  
(Register of Deeds)

By Deputy

3611331000