


CERTIFIED LAND CORNER RESTORATION


Index No. **2-15**

State of Wisconsin }
 County of Oneida } ss.

I Philip T. Hansen, do hereby certify that on the 7th day of July, 1975, I found evidence of the Quarter corner of Sections 3 and 34 Township 35 and 36, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

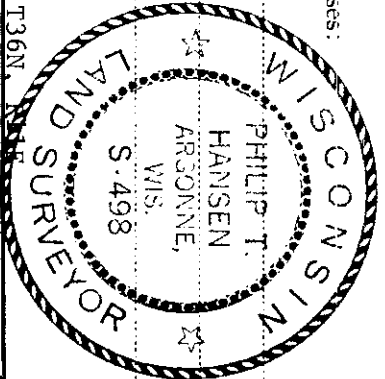

Resident witnesses:

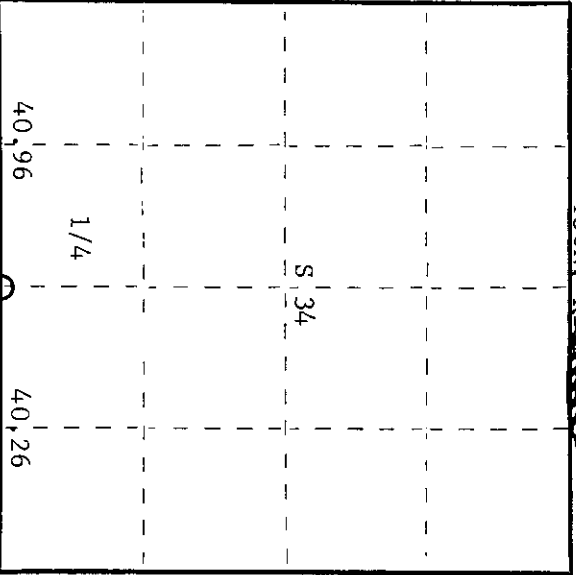

○ = Corner monument restored.

History of original corner establishment: Original corner established by Hiram C. Fellows, Government Deputy Surveyor, in 1859 from which cedar 10" bears North, 3 links and cedar 12" bears S64°W, 17 links. Corner restored by H.C. Lawrence, Registered Land Surveyor, in 1954. From recovered and restored Section Corner 33, S34, S3, and S4 he ran a random line N88°00'E, a distance of 40.96 chains, to intersect original Government 1/4 corner 4 links North. Stump of original cedar with marks is here. He dug out the point of original stake and set new 4" cedar post on old hole. Marked NBT's cedar 16", N20°E, 26 links, and cedar 12", S5°E, 63 links. Someone's old B. ash 15", S15°W, 49 links.

Description of corner evidence found:
 Recovered 4" cedar post, squared and scribed S3 T35N; 1/4-S; S34 T36N; 1/4-S; R11E, in good condition.

Also recovered an old post from the muck.
 Recovered OBT's cedar 10", North, 3 links, now a 4' stub scribed 1/4-S; cedar 16" (17"), N20°E (N24°E), 26 links, scribed 1/4-S BT; cedar 12", S5°E (S3°E), 63 links, scribed S4 NBT; and B. ash 15", S15°W, 49 links, now a cut-off decayed stump.
 Also found an old wooden cedar point buried in muck while digging new hole.

Description of monument and accessories I established to perpetuate the original location of this corner:
 Replaced 4" wood stake with 2 1/2" iron pipe with brass cap stamped - S498
 T36N, R11E
 Drove old cedar point in beside new iron pipe.

1/4 S|34
 3

T35N, R11E
 CPT-1975

Dated at Rhinelander, Wis., this 23rd day of July, 1975.

Signature *Philip T. Hansen* Title Registered Land Surveyor
 (County Surveyor, Registered Land Surveyor, or other duly authorized official)

Office of Register of Deeds, County of Oneida
 Instrument was filed in this office for record on the 1st day of October, 1975 at 3:00 o'clock P.M.

Doris Temple Fuchs
 (Register of Deeds)

By _____ Deputy

3611340020