

CERTIFIED LAND CORNER RESTORATION



Index No. Y-4

State of Wisconsin

County of Oneida } ss.

I, Phillip T. Hansen, do hereby certify that on the 8th day of May, 1980, I ~~restored~~ established the SE 1/16 corner of Section 31 Township 35, North, Range 11 East, Fourth Principal Meridian, as described hereon; and that from this evidence I established a new monument and accessories as described hereon to perpetuate the original location of this corner.

Resident witnesses:  
Glen Barker  
Jim Clafin  
Herb Wagoner

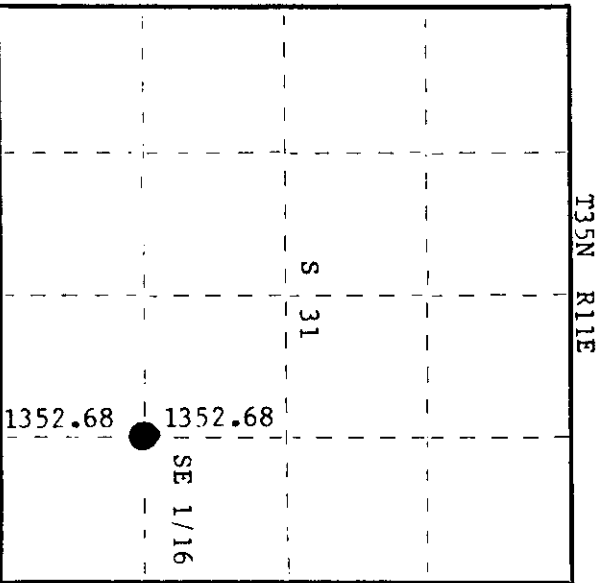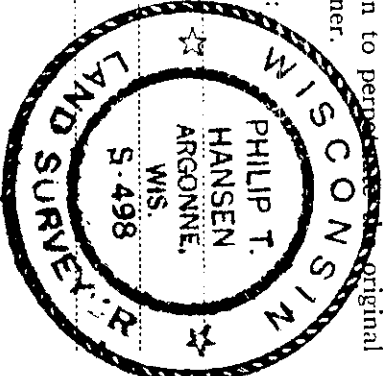

○ = Corner monument restored.

History of original corner establishment:

Description of corner evidence found:  
No evidence of any corner recovered.  
Corner established by traverse and computations.  
Computed distance from E 1/16 between Sections 31 and 6 to EC 1/16, Section 31 is 2705.35' at bearing N 6° 55' 17" E.  
Computed location of SE 1/16 is 1352.67' from E 1/16 and 1352.68 feet from EC 1/16.

Description of monument and accessories I established to perpetuate the original location of this corner.  
Set a 1-1/2" iron pipe with 2" brass cap projecting 18" - stamped:  
Marked NBT's -  
B1. Spruce 7" N50°W 6.03'  
B1. Spruce 9" N52°E 9.38'  
both scribed 1/16 BT.  
S498  
T35N R11E  
SE 1/16 S 31  
CPI-1980

Dated at Rhinelander, Wis., this 30th day of May, 1980

Signature: Phillip T. Hansen Title: Registered Land Surveyor Registration No. S-498  
(County Surveyor, Registered Land Surveyor, or other duly authorized official)  
Office of Register of Deeds, County of Oneida  
Instrument was filed in this office for record on the 5th day of June, 1980  
at 1:30 o'clock P. M.

Doris George Kuehn  
(Register of Deeds)

By: \_\_\_\_\_ Deputy

3511311010