

A DEPENDENT SURVEY OF PARTS OF
T35N R8E, T34N R8E, AND
T34N R7E IN LINCOLN COUNTY WISC.

NOTE: ALL LOCATIONS OF STREAMS,
LAKES SWAMPS AND ETC. ARE NOT ON
SECTION LINES BUT ON RANDOM LINES.
THIS SURVEY WAS MADE ACORDING TO
U.S. LAND OFFICE RULES OF 1930.

SURVEYED 1937. BY FRANCIS X. FUCHS.
MERRILL, WISC.

T35N R8E	PAGES	5-60
T34N R8E	"	60-126
T34N R7E		126-134
T32N R7E		150-159
T33N R5E		166- 204 ²⁰⁹
T35N R5E	ENTERED	6/10/68 215 ²⁰⁹ - 215
	BY	BILL FONKO

RECEIVED & FILED # 17294
 Oneida County Surveyor's Office
 Date MAR 1 1 1988
 By M.R.
 OCS Area #

T.35N. R.8E.

		32	31							
	30	5	22	4	17					
		28		21		18		6	7	
	29	8	20	9	16	10	7	11	12	
			27	26		15	10	11	12	
	28	17	18	16	15	15	8	14	13	
							9			
	25	23		13		14		9	10	
26	19	22			32	22	(37A)	23	38	24
		26				37		(37B)		43
					33	27	(37A)	26	39	25
						36		41		42
					34	34	38	35	41	36
						35		40		44

L729M

L729

T.35N. R.8E.

EAST BET. 1, 12 ON RANDOM

11.5 ENTER SWAMP

32.7 LEAVE "

40.64 FOUND OLD STAKE AND BT.

SET 1/4 STONE. STAKE AND BTS WERE CHARRED BY FIRE MANY YEARS AGO. MOUNDED WITH STONE.

SUGAR 12" SOUTH 49.2 LKS.

NEAREST LARGE HARDWOOD TREE

72.59 TO IRON PIPE SECTION COR. AS SET BY V. MAINE ONEIDA CO SURVEYOR

SOUTH BET. 10-11

00.0 OFFSET EAST 10'

72.80 TO LAKE

70.41 HUBED AND OFF SET WEST AT 90°

180.5 ft. & BET HUB ON RANDOM

ON NORTH SHORE AND HUB ON RANDOM

ON SOUTH SHORE 81° 56'

19.30 CHAINS ACROSS

BETWEEN HUBS.

89.71 STATION OF HUB ACROSS

93.40 ENTER SWAMP


100.90 LEAVE SWAMP (109.0 SWAMP) (119.2 CREEK) FLOWS WEST

121.82 TURNED LT OFF BACK TAN. 94° 35'

119.25 ft. TO ORIGINAL SEC CORNER

TWO BT. FOUND LYING ON THE GROUND.

BACK TO 40.66 AND SET STONE

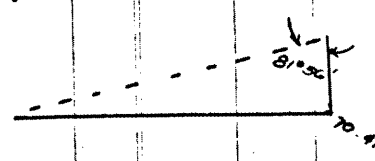

TED
KE

IONAL

17294

17294

T35N R.8E.

TO WHICH IMPROVEMENTS IN LAND
HAVE BEEN MADE. MAKING IT THE LEGAL
1/4 LINE.

ELM 16" S24°E 105.5 LKS
ELM 3 N32°W 42. LKS

MOUNDED WITH STONE.

73.89 TO SEC. CURS 13, 18, 19, 24 AS
SET BY ONEIDA CO.

76

EAST BET 11-14 VAR. : 2° 30'
BEGINING AT M.C. ON WEST SHORE OF
HILT LAKE EVIDENCED BY OLD STAKE
AND B.T.S. SET STONE IN THE SWAMP,
BRACED WITH STAKES AND MOUNDED WITH
STONES

SPRUCE 6" N70W 37.6 LINKS
SPRUCE 5" S56W 32.6 LKS.

AN OLD BUT NOT ORIGINAL BEARING TREE
BEARS N17E 49" (TAMARAC 9").

SOUTH 20° E. AN OLD TAMARAC B.T. 6"-
57". M.C. IS NORTH 176' FROM OUT-
LET 22' WIDE. SPRUCE GROVE AT M.C.

00.0 SET M.C. ON EAST SHORE 34.3 NORTH
OF RANDOM LINE

NORWAY PINE 10" S78E 10.6 LKS
A STONE 2' X 3', 12" ABOVE GROUND
43.3 LK. TO NEAREST EDGE N344

37.

MOUNDED WITH STONE AT FOOT OF
SLOPE APROX. 18' HIGH.

35.61 SET 1/4 COR BY PORPORTIONAL
MEASUREMENT

17294

1729

T35N R8E

	SPRUCE 3"	S20E	64.8 LKS.
	SPRUCE 4"	S71W	67.4 LKS.
	OLD TAMARAC BT 12"	N39W	80.3 LKS.
	OLD TAMARAC BT 12"	N35E	81.6 LKS.

MOUNDED WITH STONE AND
INSERTED NEW STAKE AS AN AID
IN LOCATING THE STONE.

77.54 TO IRON PIPE SECTION CORNS.
7,12,13,18 AS SET BY ONEIDA CO.

SOUTH BET 11-12

FROM SEC. CORNS. 1,2,11,12 ALONG HIGH-
WAY 17.

40.95 SET $\frac{1}{4}$ STONE AS EVIDENCED BY
WITNESS AND INTERSECTION OF ROADS.
12" BELOW BLACK TOP

	SPRUCE 4"	S42E	66.9 LKS
	SPRUCE 3 $\frac{1}{2}$ "	N55W	53 LKS.

OFF SET A STAKE WEST 30 LKS

82.08 TO STONE SEC CORNS. 11,12,13,14
SEE PAGE 11.

SOUTH BET 13-14

BEGIN AT SEC CORNS. 11,12,13,14
FOLLOWING HIGHWAY 17.

20.00 ROAD WEST TO HILT LAKE

41.27 SET $\frac{1}{4}$ STONE MIDWAY BETWEEN
SEC. CORNERS.
12" BELOW TOP OF BLACK TOP

T35N R8E

79.17 TO 6.45' SOUTH OF SEC. CORN. 26, 27, 34, 35.
(SEE PAGE 36)

EAST BET 25-36

BEGINNING AT 77.70 BET 35-36 TURNED
LT OF BACK TAN 88°.

10.30 ENTER SPRUCE SWAMP

14.95 E CREEK 9' WIDE N-S

28.50 LEAVE SWAMP

34.40 ENTER SWAMP.

46.30 OLD RR. GRADE.

40.63 SET 1/4 STONE SOUTH 50.0' OFF
RANDOM BY (PROP. MEAS) AT
SWAMP LEVEL. AT FOOT OF SMALL
HILL EAST OF STONE. WEST TO FOOT
OF HILL ACROSS VALLEY 62'

TAMARAC STUMP 21" N 70 W 69.7
" " 12" S 53 W 81.97

MOUNDING WITH A FEW STONES.

59.40 E HIGHWAY 17.

62.40 ENTER SWAMP

65.0 POND

66.5 ACROSS POND.

70.0 ~~ENTER~~ LEAVE SWAMP.

74.5 ENTER SWAMP.

79.20 LEAVE SWAMP

80.31 TURNED LT. OFF BACK TAN (SOUTH)
TO IRON POST SET BY ONEIDA CO.
92° 16' 55.2'

PINE STUB N.W. 90.2'

17294

17294

T.35N. R8E.

EAST BET 24-25.

BEGINNING 3.0' SOUTH OF SEC CORN.

23,24,25,26 (SEE PAGE 37B)

0.83 ENTER MEADOW N-S

2.29 LEAVE " N-S

8.10 AN OLD ROAD

28.26 SET A FLAG FOR TRIANGULATION

29.40 TO PINE LAKE.

29.59 SET M.C. AT WATERS EDGE.

SOUTH 65.7'

BIRCH 5" N26W 42.7 LKS.

PINE STUMP 12" S8W 14.55 LKS.

SOUTH TO RT. IN SHORE LINE (N.S. - E.W) 310'

MOUNDED WITH COARSE GRAVEL TO AVOID

WAVE WASH SHORE LINE N-S.

0.00 BEGINNING AT 0+00 AGAIN ACROSS THE LAKE

OFF SET NORTH 301.85' AND TURNED 77°10'

BET THE HUBS ON TAN. (1325.0' BET HUBS)

- 2.0 TO LAKE.

46.29 (RANDOM LINE STATIONING CONTINUED FROM

WEST SHORE) SET M.C. ON EAST

SHORE SOUTH 106.7'

WHITE POST SET BY CONSERVATION

COMM. MARKING LAKE IMPROVEMENT

WORK SITE 98.6 LKS.

SOUTH TO POINT ON SHORE LINE 100'

4.25 FROM HUB ON EAST BANK TO E
OF HIGHWAY 17.

14.95 ENTER SWAMP

20.80 LEAVE "

29.35 TURNED LT. (SOUTH) OFF BACK TAN

TO SEC CORN 19, 24, 25, 30 AS SET

BY ONEIDA CO STAKES TO VERIFY IT

181.2' 88° 59'

L729

L729

T.35N. R.8E.

EAST BET 1-36

BEGIN AT STATION 78.72 TURNED THIS
RANDOM LINE SOUTH $3\frac{1}{4}^{\circ}$ TO RUN NEAR
TO TRUE LINE.

3.14 CREEK 6' FLOWS NNE.
6.34 LEAVE SWAMP.
33.60 ENTER SWAMP.
39.60 LEAVE "
40.19 TURNED RT. OFF FORWARD TAN. (SOUTH)
 $94^{\circ}55'$ 17.6' TO ORIGINAL $\frac{1}{4}$ SEC
COR. AS EVIDENCED BY OLD B.T. AND
STAKE. STONE SETS BET TWO
HILL SEPARATED BY 50' OF SWAMPY
GROUND MIDWAY BET. HILLS. AT END OF
POINT IN SWAMP

PINE STUMP 14"	S33E	65.9 LKS.
OLD B.T. 12"	S18W	24.7 LKS.
W.PINE 7"	N6W	53.9 LKS.

MOUNDED WITH STONE.

58.80 ENTER SWAMP N-S
62.90 LEAVE " NE-SW
69.30 ENTER " N-S
72.60 POND.
74.20 LEAVE POND
79.0 LEAVE SWAMP N-S
79.62 TURNED LT. OFF BACK TAN. SOUTH
 $100^{\circ}16'$ 155.0' TO IRON POST
SET BY ONEIDA CO.